



## Fruit juice processing using membrane technology: A review



Chiranjit Bhattacharjee\*, V.K. Saxena, Suman Dutta

Department of Chemical Engineering, Indian Institute of Technology (Indian School of Mines), Dhanbad, Jharkhand 826004, India

### ARTICLE INFO

#### Keywords:

Membrane separation  
Fruit juice  
Membrane fouling  
Ultrafiltration  
Membrane distillation

### ABSTRACT

Membrane technology has emerged as a substitute to traditional juice clarification and concentration processes as they require less manpower, reduce operating cost and low temperature. It is a low temperature process in which the organoleptic quality of the juice is almost retained. The advantages of these membrane processes over traditional methods are lower thermal damage to product, increase in aroma retention, less energy consumption, and lower equipment costs. Membrane concentration of fruit juice not only provides microbiological stability but also permits economy in packaging and distribution of the finished product due to a reduction in bulk by weight and volume. The biggest problem in the use of membrane based processes for the clarification/concentration of fruit juices is membrane fouling. Membrane fouling manifests itself as a decline in flux with the time of operation, reducing the membrane permeability. The degree of membrane fouling determines the frequency of cleaning, the lifetime of the membrane, the membrane area needed and consequently costs, design and operation of membrane plants. In this review, different membrane separation methods including microfiltration, ultrafiltration, nanofiltration and reverse osmosis for fruit juice clarification/concentration reported in the literature in the last fifteen years are discussed. Membrane Distillation methods for juice concentration is also covered in this review.

### 1. Introduction

Thermal processing remains the most widely employed method for shelf-life extension and food preservation and concentration. However, industrial thermal treatments may have negative impacts on nutritious components (such as anthocyanins, carotenoids, vitamins and bioactive proteins (Barros, Nunes, Gonçalves, Bennett, & Silva, 2011; Kechinski, Guimarães, Noreña, Tessaro, & Marczak, 2010; Provesi, Dias, & Amante, 2011; Van den Hout, Meerdink, & Vant Riet, 1999)) and sensory parameters (such as color, aroma, flavor (Nisha, Singhal, & Pandit, 2009; Timoumi, Mihoubi, & Zagrouba, 2007)). Membrane technology has emerged as the alternative to traditional thermal techniques for fruit juice clarification and concentration that were widely applied in the dairy and beverage industries. Membrane Separation methods are utilized in the food industry due to their less manpower requirement, greater efficiency and shorter processing time than conventional filtration. Consequently, the operational costs of using membrane processes are significantly lower than those of conventional processes (Nunes & Peinemann, 2001). Fruit juices are usually concentrated by multi-stage vacuum evaporation in order to reduce the storage and shipping costs, and to achieve stability and longer storage. However, loss of fresh juice flavors, color degradation and a “cooked” taste are some unwanted effects are associated with this method mainly due to

the thermal impact. Researchers, over the years have tried to develop novel methods for retaining the flavor, aroma, appearance and mouth feel of freshly squeezed juices in the concentrate and ultimately in the reconstituted juice. Researchers have greatly succeeded in developing aroma retention, innovative process control and product blending methods to produce a good quality concentrate that can lead to consumer satisfaction, but not up to that level to make it readily unrecognizable from fresh juice. Significant efforts have been devoted in studying Ultrafiltration and Reverse Osmosis for juice clarification/concentration. Improved methods such as freeze concentration, sublimation concentration are also analyzed for juice processing (Koseoglu, Lawhon, & Lusas, 1990). But, based on recent research, the most encouraging alternative has to be membrane concentration. The types of pressure driven membrane separation processes which are most commonly used in juice processing are ultrafiltration (UF) and microfiltration (MF). They are able to separate particles in the approximate size ranges of 1–100  $\mu\text{m}$  and 0.1–10  $\mu\text{m}$ , respectively (Katsanova & Fedotov, 2009).

In recent times, advancements made in basic science and technology has enabled researchers to develop new membrane materials and improvements made in process engineering and intensification have helped overcoming major limitations of membrane based techniques. New membrane processes including membrane and osmotic distillation

\* Corresponding author.

E-mail address: [chiranjit@ce.ism.ac.in](mailto:chiranjit@ce.ism.ac.in) (C. Bhattacharjee).

and integration of these techniques might contribute to the improvement of quality and make it economically feasible at an industrial level for fruit juice processing (Calabro, Jiao, & Drioli, 1994; Girard & Fukumoto, 2000). Wide variety of membrane modules including tubular, hollow fiber and spiral wound have been used in the food industry according to their advantages. They can be applied within the production process, i.e. for clarification and concentration, as well as for treating the resulting wastewater that is generated prior to disposal (sewer or surface discharge) or re-use.

Raw fruit juice contains lower molecular weight components like sugar, acid, salt, flavor, and aroma compounds. It additionally contains noteworthy measure of macromolecules (100–1000 ppm) for example, polysaccharides (pectins, cellulose, hemicellulose, and starch), dimness shaping segments (suspended solids (SSs), colloidal particles, proteins, and polyphenols) and so forth. Therefore in order to store for longer periods for commercial use, the juice needs to be clarified. Clarification is necessary for the removal of such macromolecules. In traditional processes, enzyme treatment of raw juice is being performed with the help of enzymes (pectinase and amylase) for reducing the pectic substances and starch content followed by addition of fining agents. This enzymatic treatment helps in reducing the cloudiness and viscosity and thereby makes the clarification process easier. The main function of the fining agents such as gelatin, bentonite etc. is to enhance the settling of formed flocs. Then suspended solids, colloidal particles, proteins etc. are removed by conventional filtration. To facilitate the filtration process, filter aids such as diatomaceous earth or kieselguhr are used. The above mentioned traditional methods to clarify fruit juice are batch processes and are highly labor-intensive and time-consuming. Also one major concern is the incomplete removal of additives (fining agents and filter aids) from product juice which can affect the taste of juice. (DasGupta & Sarkar, 2012)

Thermal evaporation is one of the most conventional techniques for fruit juice concentration. Despite its economic feasibility and technology, it does exhibit some disadvantages when applied to fruit juices. Even under vacuum, operating temperatures are still high enough to bring about significant deterioration in the product juice such as degradation of color, loss of nutritional characteristics, and the development of a “cooked” taste. For example, lipids and ascorbic acid can be oxidized, amino acids and sugars can undergo the Maillard browning reaction, and pigments, especially anthocyanin, carotenoids, and chlorophyll, can be degraded (Toribo & Lozano, 1986; Lozano & Ibarz, 1997; Mikkelsen & Poll, 2002; Kato et al., 2003; Maskan, 2006). Due to high temperatures of evaporation, loss of aroma compounds occur in fruit juices (Lin, Rouseff, Barros, & Naim, 2002; Ramteke, Eipeson, & Patwardhan, 1990; Nisperos-Carriedo & Shaw, 1990).

Hence, compared to these traditional methods, energy saving membrane operations such as microfiltration (MF) and ultrafiltration (UF), represent a valid alternative for the clarification of additive-free high-quality fruit juices with natural fresh taste (DasGupta & Sarkar, 2012). One of the important plus points of using membranes in the clarification/concentration of fruit juice is that traditionally used dead-end mode operated cartridge or bag filters, generates a lot of media waste that needs to be disposed of. But there is very little build up on the surface in crossflow membrane separation processes therefore media disposal problems are minimized. (Ionics Inc, 2004). This paper will review the recent significant progress on membrane processes for clarifying and concentrating fruit juices, including the use of microfiltration, ultrafiltration, reverse osmosis, direct osmosis concentration, membrane and osmotic distillation, and integrated membrane processes.

## 2. Membrane processes

Below we present different membrane processes commonly used in the food processing industry and their applications in fruit juice processing.

### 2.1. Microfiltration (MF)

In the fruit juice processing industry, the main purpose of MF is mainly clarification to remove suspended solids (SS), fat and high molecular weight (HMW) proteins. In dairy industry, MF is used to clarify cheese whey, as well as de-fat and reduce the microbial load of milk (Merin, 1986). Microfiltration can also be used to separate fruit juices into a fibrous concentrated pulp, and a clarified fraction free of spoilage micro-organisms. Fruit juice processing industry widely uses MF for juice clarification purpose (De Oliveira, Doce, & de Barros, 2012; Vaillant, Millan, Dornier, Decloux, & Reynes, 2001).

### 2.2. Ultrafiltration (UF)

UF is essentially utilized for fractionation, fixation and filtration. For instance, UF can be utilized to fractionate milk for cheese generation, i.e. the retentate part contains proteins, fat and certain insoluble and bound salts, while the permeate contains lactose and solvent salts (Brans, Schroën, van der Sman, & Boom, 2004). Concentration of skimmed milk using UF produces a high calcium and protein content product (Vyas & Tong, 2003) which is one of its major applications in the dairy industry.

The fruit juice industry also uses UF for both clarification and concentration depending upon the MWCO. For elucidation, the permeate instead of the retentate is the result of intrigue. UF is utilized to clear up a wide assortment of natural juices by evacuating polluting influences, for example, yeast, molds, microscopic organisms and colloids, together with proteins, tannins and polysaccharides, which all confers stability to the last item (Mohammad, Ng, Lim, & Ng, 2012).

### 2.3. Nanofiltration (NF)

NF is most normally used to isolate a mixture that has a blend of some attractive parts and some that are not alluring. A case of this is the concentration of lactose syrup (Zhang, Yang, Zhang, Zhao, & Hua, 2011). It facilitates the passing of water through the membrane and at the same time holding back the sugar, and thereby concentrating the solution. NF is also effective in concentrating divalent salts, bacteria, proteins and other constituents that have a molecular weight > 1 kDa.

NF can be utilized to in part demineralization, and in addition to concentration. NF is a moderately new process for the demineralization of whey (Pan, Song, Wang, & Cao, 2011) in the dairy industry. In the juice processing industry, NF can be used to concentrate useful bioactive compounds from fruit juices e.g. lycopene in case of watermelon juice (Arriola et al., 2014).

### 2.4. Reverse osmosis (RO)

The main application of RO in food processing industries is to concentrate, purify and recover valuable components. RO can also be used in combination with other membrane separation processes, such as MF and UF. RO requires less operational cost due to evaporation, or even the elimination of this step (Hedrick, 1983; Merson, Paredes, & Hosaka, 1980). The energy requirements of RO have been shown to be significantly less than for mechanical vapor compression. RO is also applied for preconcentration of fruit juices. The method can be used instead of high temperatures. In this way, the qualitative degradation of the product due to exposure to heat is significantly reduced and the process becomes of lower cost (Kotsanopoulos & Arvanitoyannis, 2015). RO's other advantages include:

- Quality of separation
- Minimal heat damage
- Low amount of waste generation and treatment
- Smaller footprint
- Lower capital requirements

Some disadvantages include restricted working pressure territory specific to some applications and film fouling with certain feed stocks.

### 2.5. Electrodialysis (ED)

Electrodialysis is a comparatively new process in terms of its use in food industry. Some applications of ED in food industry are as follows:

- Demineralization of milk and whey (Andres, Riera, & Alvarez, 1995)
- De-acidification of fruit juice (Vera, Ruales, Dornier, Sandeaux, Persin, et al., 2003; Vera, Ruales, Dornier, Sandeaux, Sandeaux, et al., 2003)
- De-ash sugar solutions (Boye & Arcand, 2012)

### 2.6. Pervaporation

Pervaporation is defined as a separation technique in which a liquid feed mixture is separated by partial vaporization through a non porous permselective membrane. Because pervaporation is based on a solution diffusion mechanism, it can be used to solve separation problems encountered with traditional, equilibrium-based, separation techniques (Karlsson & Tragardh, 1996). For the food industry, the following applications are being researched:

- 1) Alcohol removal from wine (Takács, Vatai, & Korányi, 2007)
- 2) Aroma recovery from fruit juices, beer, herbal and flowery extracts (Catarino, Ferreira, & Mendes, 2009; Pereira et al., 2005)
- 3) Restoration of aroma components during fermentation (Schafer, Bengtsem, Pingel, Bödeleker, & Crespo, 1999)

Pervaporation is, however, despite its successes and potentials, so far not established in the food industry.

### 2.7. Membrane contactors – osmotic distillation

Membrane contactors achieve a gas liquid or liquid/liquid mass transfer of one phase to another without dispersion by passing phases on both sides of a microporous membrane. Controlling the pressure difference between the two phases carefully, one of the phases can be immobilized in the pores of the membranes and an interface between the two phases can be established at the mouth of each pore (Lipnizki, 2010). The concentration, and/or pressure difference between the feed and the permeate side is the driving force. Some of its applications in the food industry are:

- 1) Soft drinks carbonation (Klaassen, Feron, & Jansen, 2005)
- 2) Alcohol removal by osmotic distillation (Varavuth, Jiraratananon, & Atcharyawut, 2009)
- 3) fruit juice concentration (Cassano, Conidi, Timpone, D'avella, & Drioli, 2007; Cassano, Donato, & Drioli, 2007; Cassano, Marchio, & Drioli, 2007).

## 3. Membrane fouling and concentration polarization in juice processing

One of the main problems of using of membranes for clarifying or concentrating fruit juices is membrane fouling and concentration polarization. Concentration polarization is reversible fouling while pore blocking is mostly irreversible. Concentration polarization and pore blocking results in flux decay with the process time, thus reducing the permeability of the membrane or making a thin layer over the membrane surface. Membrane fouling controls the frequency of cleaning, the lifetime of the membrane, area needed for separation which ultimately determines the costs, design and operating parameters of membrane plants. Membrane fouling is a complicated phenomenon due to the involvement of various colloidal particles present in the juice in

making the cake layer over the membrane surface or blocking the membrane pores. The fouling materials in fruit juice are mainly composed of cell wall polysaccharides and macromolecules, such as pectins (polyuronic acids mostly derived from -galacturonic acid, primarily plentiful in apple and citrus fruits), cellulose, lignin and hemicelluloses. The main problems generated by build-up of these foulants are the reduction in flux and changes of physico-chemical properties of filtrate. Therefore a major portion of research is centered around at effectively mitigating membrane fouling and significant restoration of membrane flux. Nevertheless, the complete elimination of the fouling is impossible (Madaeni, Mohamamdi, & Moghadam, 2001)

### 3.1. Methods of reducing concentration polarization and membrane fouling

Pretreatment methods before juice clarification can reduce the particulate suspended materials in the juice, resulting in improvement of flux and attainment of higher concentration factors. The first step for pretreatment for clarification of citrus juices using membrane separation is pectin removal with the help of enzymes.

The most used method for pretreatment of juices to remove pectin is enzymatic treatment by pectinase. To reduce the viscosity of the juice, mixtures of enzymes, known as pectinases, are used to hydrolyse pectin into poly-d-galacturonic acid fragments, with relatively little pulp which essentially leads to an increase in permeate fluxes and yield recovery (Alvarez, Alvarez, Riera, & Coca, 1998). More than 95% recovery of the product can be achieved by UF of such depectinised juices. Combined effect of pectinase and cellulase was successful in enhancing permeate flux in microfiltration of passion fruit with ceramic membranes (Vaillant, Millan, Brien, & Decloux, 1999). They found minimum viscosity and high clarity to be the optimum conditions for depectinisation.

Proteins, fibers, suspended solids etc. are some other components which affect the filtration efficiency of juice. Therefore, in addition to depectinisation, various other pretreatments can also be used to improve the performance juice clarification or concentration. They include treatment with proteases for the removal of proteins (Pinelo, Zeuner, & Meyer, 2010), centrifugation (before or after depectinization) (Yousefnezhad, Mirsaedghazi, & Arabhosseini, 2016; Rai, Majumdar, Dasgupta, & De, 2007) and use of fining agents, such as gelatine and bentonite (Youn, Hong, Bae, Kim, & Kim, 2004).

Rai et al. (2007) investigated the impact of some pre-treatment methods to determine the efficiency of UF for clarification of mosambi juice. The pretreatment methods include centrifugation, fining with gelatin and with both bentonite and gelatin, pectinase treatment, centrifugation after enzymatic treatment and enzymatic treatment succeeded by fining with bentonite. After analysis all these methods they concluded that pectinase treatment succeeded by fining with bentonite was most successful in enhancing permeate flux for the same pressure. They observed a 77% increase in flux as compared with the only enzymatic treatment.

A few other flux enhancing techniques have additionally been explored with a specific end goal to diminish fouling layer and pore blocking in juice processing. They include ultrasonic vibration, periodic backwashing with air or N<sub>2</sub> (Su, Liu, & Wiley, 1993) and backwashing by pulsating flow (Ben Amar, Gupta, & Jaffrin, 1990), use of turbulence promoters (Pal et al., 2008) etc. High pulp content and high viscosity of the juice limits the performance of UF. Zhu, Mhemdi, Ding, et al. (2015) found out that for high pulp content, vibrating and rotating membrane systems are more appropriate due to the amount of shear rate created at the membrane interface leading to optimum control of fouling phenomena.

Reducing the interaction between proteins and other foulants with the membrane using membrane surface modifications can be also helpful in reducing fouling phenomena (Rana & Matsuura, 2010). A narrow pore size distribution can reduce the fouling compared to more porous membranes such as MF membranes. Hydrophobic membranes

are more prone to fouling compared to hydrophilic membranes (Kumar & Ismail, 2015).

#### 4. Membrane modules

Different configurations of membrane modules have been used by researchers to examine the effect on fruit juice clarification and concentration. The most commonly used modules are plate-and-frame (He, Zhijuan, & Shunxin, 2007), hollow fiber (Laorko, Li, Tongchitpakdee, & Youravong, 2011) tubular (Cassano et al., 2007), spiral wound (Ghosh, Balakrishnan, Dua, & Bhagat, 2000), and dead-end or stirred batch cells (Riedl, Girard, & Lencki, 1998). In the plate-frame module, two flat sheet membranes are sandwiched around a support plate. The membranes are attached to the plate with the help of either a gasket with locking devices, glue or directly bonded. The internally porous plate provides a flow channel for permeate which is collected from a tube on the side of the plate. The feed channel can be a clear path with channel heights from 0.3 to 0.75 mm. Tubular membranes primarily function in a tangential or cross-flow mode. Here, the feed solution is pumped at high velocities along the center of the tube. High cross-flow feed velocities helps in mitigating the development of a concentration polarization layer over the membrane surface leading to high and stable flux and easy cleaning. Tubular modules are superior compared to other modules w.r.t. their ability to process solutions containing high suspended solid, and for achieving higher concentration levels without plugging. For this reason they are widely utilized for juice concentration in juice processing industry. In spiral wound membrane, membranes are casted as a film onto flat sheets and are sandwiched together with feed spacers (typical thickness 0.03 to 0.1 in) and permeate carrier. They are sealed at each edge and wound up around a perforated tube. The thin spacers help in establishing the desired feed channel height. The open end of the envelope is sealed around the perforated tube. The feed is fed at one end of the module and flows along the length of the module while the retentate is collected from the end of the tube. The permeate flows through the membrane into the permeate channel and spirals toward the perforated center tube. The comparison of important characteristics of different membrane modules are listed in Table 1.

#### 5. Clarification & concentration of fruit juices using membrane process

##### 5.1. Effect of operating parameters in permeate flux

Permeate flux decline with time due to concentration polarization and fouling remains a major hindrance in fruit juice processing using membrane methods. Researchers have tried to maintain high flux levels by optimizing different operating conditions to get maximum efficiency. He et al. (2007) optimized different parameters for ultrafiltration of apple juice and listed TMP = 2.0 bar, CFV = 2.5 m/s and  $T = 50\text{ }^{\circ}\text{C}$  as best suited conditions for the study. De Bruijn, Venegas, Martinez, and Borquez (2003) compared flux and energy usage at different pressure and velocities for ultrafiltration of apple juice but couldn't find a unique optimum operating condition. Most researchers have found that an increase in temperature has a positive effect in flux enhancement in fruit juice clarification processes (Vladislavjevic, Vukosavljevic, & Bukvic,

2003; Cassano, Donato et al., 2007; De Barros, Andrade, Mendes, & Peres, 2003; Tasselli, Cassano, & Drioli, 2007; Cassano, Mecchia, & Drioli, 2008). Youn et al. (2004) performed MF of apple juice at  $25\text{ }^{\circ}\text{C}$  under the operation pressure of  $1.5\text{ kgf/cm}^2$  and flow rate of 200 mL/min, where the reduction of permeate flux was < 20% even after 60 min. Pagliero, Ochoa, and Marchese (2011) found a maximum value of clarified permeate flux of  $47\text{ L/m}^2\text{ h}$  at  $P = 1\text{ bar}$  and  $v = 1.25\text{ m/s}$  at a temperature of  $25\text{ }^{\circ}\text{C}$  in orange juice clarification. An increase in flow rate also helps in increasing flux (Cassano, Donato et al., 2007; Cassano, Marchio et al., 2007). High values of pressure helped in maintaining a high level of flux during reverse osmosis concentration of fruit juices (Jesus et al., 2007). A trend of declining permeate flux is generally observed with an increase of volumetric concentration factor in case of fruit juice concentration processes (Cassano, Donato et al., 2007; Cassano, Marchio et al., 2007; Jesus et al., 2007). A high operating pressure of 7.5 bar resulted in a higher sugar recovery in ultrafiltration of pineapple juice (Carvalho, Castro, & Silva, 2008). Laorko, Li, Tongchitpakdee, and Youravong (2010) found a linear increase in flux with increase in crossflow velocity (Fig. 1) in pineapple juice clarification due to the enhance wall shear stress on the membrane surface. Similar trend was found by Gomes et al. (2013) in microfiltration of watermelon juice and Hojjatpanah et al. (2011), Sarkar, DasGupta, and De (2009), Cassano et al. (2015) and Ushikubo, Watanabe, and Viotto (2007) for the clarification of black mulberry, mosambi, pomegranate and umbu juice respectively. The authors attributed this increase in permeation flux to the removal of surface solute particles due to the use of a higher cross-flow velocity, which lead to a reduction in fouling. Increase in temperature also had a significant flux enhancement effect in osmotic evaporation of pineapple juice (Hongvaleerat, Cabral, Dornier, Reynes, & Ningsanond, 2008). The author pointed this increase of flux with temperature to an increase of water partial pressure at the liquid–gas interface at the juice side of the membrane, which increases the driving force for water transfer. Researchers found an increase in steady state permeate flux with an increase in feed flow rate in fruit juice clarification processes (Tasselli et al., 2007; Cassano, Donato et al., 2007). Tasselli et al. (2007) and Cassano, Donato, et al. (2007) found 75 kPa and 90 kPa as optimum operating pressures in kiwifruit juice ultrafiltration using PEEK and PVDF membranes. Considering maximum permeation flux, minimum fouling and quality of kiwi fruit juice as the requirements, Cassano, Dopnato, et al. (2007) identified the best conditions to be at  $25\text{ }^{\circ}\text{C}$  of temperature, 90 kPa of pressure and 700 l/h of flow rate. Nourbakhsh et al. (2014) studied the microfiltration of watermelon juice in a cross-flow membrane system and demonstrated that the total resistance to permeation flux decreased by approximately 54% when feed temperature was increased from 20 to  $50\text{ }^{\circ}\text{C}$ . Sarkar et al. (2009) found an increase of permeate flux with an increase in electric field (voltage/metre) in cross-flow electro ultrafiltration of mosambi juice. Researchers have noticed the rapid decline of flux in the initial periods of fruit juice clarification/concentration (Cassano, Donato et al., 2007; Cassano, Marchio et al., 2007; Cassano et al., 2008; Rezzadori, Serpa, Penha, Petrus, & Petrus, 2014; Ghosh et al., 2000; Baklouti, Ellouze-Ghorbel, Mokni, & Chaabouni, 2011; Mirsaeedghazi, Emam-Djomeh, Mousavi, Ahmadkhaniha, & Shafiee, 2010; Mirsaeedghazi, Emam-Djomeh, Mousavi, Aroujalian, & Navidbakhsh, 2010 etc). They have linked this to the deposition and growth of a polarized layer formed by high molecular weight compounds present in fruit juices. Fig. 2 shows

**Table 1**  
Comparison of different membrane modules.

Module	Packing density ( $\text{m}^2/\text{m}^3$ )	Energy cost (pumping)	Channel spacing (cm)	Particulate plugging	Ease of cleaning	Hold up volume
Flat plate	300	Moderate	0.03–0.25	Moderate	Good	Low
Tubular	60	High	1–2.5	Low	Excellent	High
Hollow fiber	1200	Low	0.02–0.25	High	Fair	Low
Spiral wound	600	Low		Very high	Moderate	Low

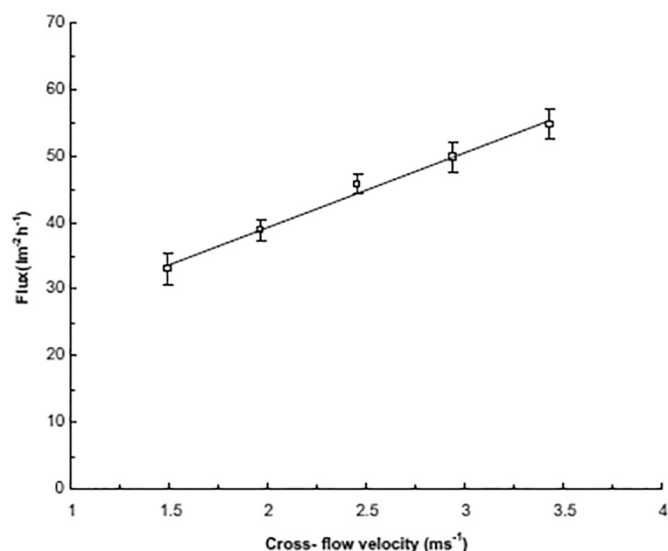


Fig. 1. Effect of cross-flow velocity on the permeate flux (membrane pore size 0.2  $\mu\text{m}$ , TMP = 0.7 bar, temperature =  $20 \pm 2$  °C) (Laorko et al., 2010).

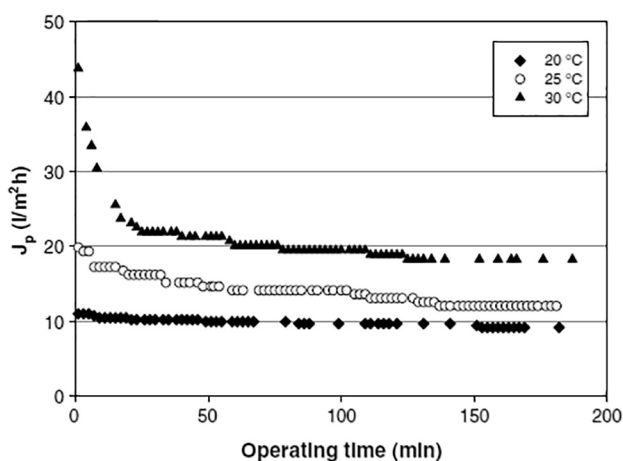


Fig. 2. Time course of permeate flux at different temperatures (operating conditions: TMP = 115 kPa;  $Q_f$  = 500 l/h) (Cassano, Donato et al., 2007).

the flux decline trend with time in ultrafiltration of kiwifruit juice (Cassano, Donato et al., 2007).

### 5.2. Effect of pretreatment in permeate flux and juice quality

The importance of feed pretreatment in augmentation of permeates flux and overall process efficiency has been covered in the Membrane Fouling section. Over the years, researchers have tried various methods of pretreatment to enhance fruit juice clarification/concentration processes. Enzymatic treatment has been widely used as a pretreatment in juice processing industries (Aguiar et al., 2012; Yazdanshenas, Tabatabaenezhad, Roostaazad, & Khoshfetrat, 2005; Toker, Karhan, Tetik, Turhan, & Oziyici, 2013; Carvalho et al., 2008; Laorko et al., 2011; Vaillant et al., 2005; Rai, Majumdar, Sharma, Das Gupta, & De, 2006; Baklouti et al., 2011). Researchers have shown that Enzymatic pretreatment helps in maintaining a higher flux level in case of clarification/concentration of citrus juices by reducing the juice viscosity and pectic materials (AIS) (He et al., 2007; Maktouf et al., 2014; Nandi, Uppaluri, & Purkait, 2009; Youn et al., 2004). Fig. 3. shows high levels of flux during apple juice pretreated by enzymatic treatment and pasteurization and clarified by using UF (He et al., 2007). Gelatin and Bentonite have also been used in pre-clarification of juices to ease the load in subsequent membrane filtration processes (Toker et al., 2013;

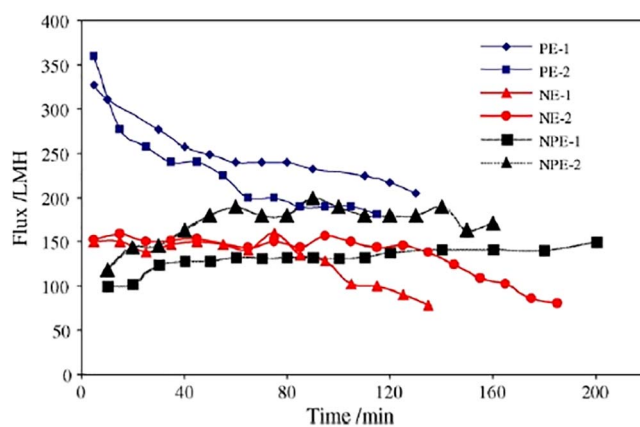


Fig. 3. The flux vs. time during clarifying apple juice differently pretreated. TMP = 2.0 bar, CFV = 2.5 m/s (He et al., 2007).

Onsekizoglu, Bahceci, & Acar, 2010). These fining agents retain the suspended solids responsible for the fouling of the membrane such as phenolic substances and proteins, in feed as large aggregates by the virtue of their electrostatic and adsorptive effects. Pectolytic enzymes are used successfully to degrade pectin which is responsible for forming a gel layer over the membrane surface (Alvarez et al., 1998; Vladisavljevic et al., 2003; Onsekizoglu et al., 2010; Carvalho et al., 2008; Laorko et al., 2010; Cassano, Donato et al., 2007; Maktouf et al., 2014; Nandi et al., 2009; Sarkar et al., 2009; De Oliveira et al., 2012; Ushikubo et al., 2007). Depectinisation also helps in reducing the juice viscosity which ultimately enhances permeate flux. Fig. 4 shows effect of enzymatic treatment on apple juice viscosity (Alvarez et al., 1998). De Bruijn et al. (2003) found that enzymatic preparations were successful in hydrolysing polysaccharides such as pectin, starch, cellulose and hemicellulose prior to UF, thereby improving membrane performance in apple juice clarification. Centrifugation as a pretreatment has also been used to remove enzyme molecules, large haze particles and adjust the pulp content (Vladisavljevic et al., 2003; Saura et al., 2012; De Oliveira et al., 2012). Pretreatment using filter aids such as bentonite has a positive effect on enhancing flux of subsequent membrane filtrations for juice clarification (Youn et al., 2004). This can be attributed to their ability to remove haze compounds by adsorption. Pre-clarification with chitosan has been successful in reducing turbidity and viscosity before fruit juice concentration (Domingues, Ramos, Cardoso, & Reis, 2014). Enzymatic pretreatment does not alter the total soluble solids content in the juices significantly but improves the clarity of the juice (Domingues et al., 2014; Nandi et al., 2009). Pulsed electric

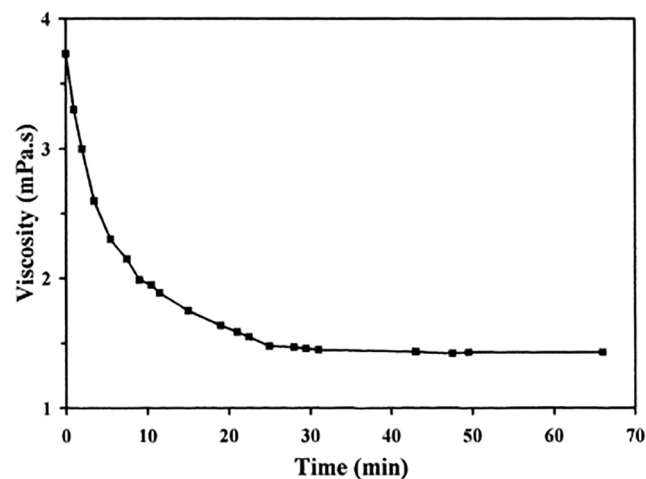


Fig. 4. Influence of enzymatic treatment with Pectinex 3XL on apple juice viscosity (Alvarez et al., 1998)

field has also been used as a pretreatment in chicory juice clarification with satisfactory results (Zhu et al., 2013).

### 5.3. Effect of membrane treatment on juice quality

Microfiltration and Ultrafiltration have been widely used for fruit juice clarification in recent years. Ultrafiltration is also used for concentration based on its molecular weight cut-off. Ultrafiltration with a 50 kDa PES membrane produced a good quality clarified apple juice with acceptable color, clarity and turbidity values with the rejection of pectin, starch and thermo- acidophilic bacteria (He et al., 2007). Similar commercial specifications in color, clarity and turbidity were achieved by De Bruijn et al. (2003) and Vladislavljevic et al. (2003) using inorganic membranes for apple juice clarification. They also found that the larger MWCO membrane had a positive effect on shelf life of the juice. With regard to soluble solids and acids in the clarified apple juice, UF treatments didn't show any significant difference (Zarate-Rodriguez et al. 2001; Youn et al., 2004; Vladislavljevic et al., 2003; De Bruijn et al., 2003). Valdisavljevic et al. (2003) analyzed that polyphenolic content in the apple juice permeate decrease with the decrease in MWCO of the UF membranes. Zarate-Rodriguez et al. (2001) observed browning in clarified apple juice with a higher MWCO membrane due to the development of polyphenols-oxidase (PPO) during storage. Research of Youn et al. (2004) showed that Ultrafiltration with a 30 kDa membrane didn't have a notable change of vitamin C in the clarified apple juice. Warczok, Ferrando, Lopez, and Guell (2004) used nanofiltration for concentration of apple juice and achieved a good degree of fructose concentration. Reverse Osmosis produced a 3 fold increase in soluble solids content of concentrated apple juice and with further concentration with osmotic evaporation, the value rose to 6 fold. (Aguilar et al., 2012), though in both cases, total phenolics and antioxidant capacity loss was significant. Comparison of different physicochemical properties analyzed by Aguiar et al. (2012) is listed in Table 2. Onsekizoglu et al. (2010) used ultrafiltration followed by osmotic distillation, membrane distillation or a combination of these methods, in order to concentrate apple juice up to 65 °Brix. They found similar nutritional and sensorial characteristics of the concentrated juice compared to that of the original juice. They were particularly successful in retaining bright natural color and pleasant aroma in the concentrate that were lost during thermal evaporation. The authors concluded that clarification using ultrafiltration membrane led to a reduction of total polyphenolic content, however the concentration processes did not significantly affect this property.

Microfiltration and Ultrafiltration of orange juice produces a clear juice removing the suspended solids and retaining almost the same amount of soluble solids and acids (Pagliero et al., 2011; Toker et al., 2013). Similar result was found in case of UF also by Cassano, Marchio, et al. (2007) with the addition that polyphenolics were well preserved

**Table 2**  
Physicochemical characteristics of concentrated apple juice obtained by reverse osmosis and osmotic evaporation (Aguilar et al., 2012).

Analysis	Feed	Reverse osmosis	Osmotic evaporation
pH	3.83 <sup>a</sup>	3.79 <sup>b</sup>	3.67 <sup>c</sup>
Soluble solids (°Brix)	8.7 <sup>c</sup>	28.1 <sup>b</sup>	51.2 <sup>a</sup>
Total solids (g/kg)	92.2 <sup>c</sup>	291.1 <sup>b</sup>	526.8 <sup>a</sup>
Titrateable acidity (g/kg)	20.2 <sup>c</sup>	64.4 <sup>b</sup>	119.0 <sup>a</sup>
(g/kg dry matter)	219.1 <sup>a</sup>	221.2 <sup>a</sup>	225.9 <sup>a</sup>
Total phenolics (mg GA/kg)	495.3 <sup>c</sup>	1393.7 <sup>b</sup>	2328.4 <sup>a</sup>
(mg GA/kg dry matter)	5372.0 <sup>a</sup>	4787.7 <sup>b</sup>	4419.9 <sup>c</sup>
Antioxidant activity	5.9 <sup>c</sup>	13.2 <sup>b</sup>	18.6 <sup>a</sup>
(mmol TE/g)			
(mmol TE/g dry matter)	57.4 <sup>a</sup>	45.3 <sup>b</sup>	35.4 <sup>c</sup>

Different letters indicate significant difference between different samples ( $p \leq 0.05$ ), determined by Tukey's test.

in the clarified orange juice. Toker et al. (2013) found that ascorbic acid and phenolic content in the clarified orange juice was higher for higher MWCO membrane. A higher value of total antioxidant activity (TAA) in the product is very much desirable due to their role in reducing the risk of free radical related oxidative damage associated with a number of diseases. Galaverna et al. (2008) evaluated changes in some important physicochemical properties during integrated membrane processing of blood orange juice. They found nearly same amount of antioxidant compounds apart from anthocyanins and Vitamin C in the concentrate as that of the feed juice during the process, though there is about 15–20% decrease in the contents of anthocyanins and Vitamin C in the concentrate. Only 15% reduction of TAA was found in the blood orange juice concentrate. The concentrate retains its bright red color and its pleasant flavor. Reverse Osmosis produced concentrated orange juice with a high percentage of soluble solids and vitamin c which showed a increasing trend with increasing pressure (Jesus et al., 2007). Reverse Osmosis concentrate also preserved the characteristic aroma of the juice, differing significantly from the juice concentrated by thermal evaporation. Their results are shown in Table 3. Mirsaedghazi and Emam-Djomeh (2017) was successful in clarifying bitter orange juice using microfiltration with almost 98% turbidity removal and acceptable levels of polyphenols content in the final product.

The use of membrane technology for the concentration of lycopene, a carotenoid with high antioxidant capacity from watermelon juice is feasible and represents a good alternative for the industrial production of this compound. The molar mass of lycopene is 536.85 Da and is therefore retained on the concentrate side of the membrane. Rai et al. (2010) used microfiltration and achieved an approximately threefold increase in the lycopene content of the retained stream of watermelon juice. Gomes et al. (2013) attained an increase of 400% under optimum operating conditions during MF of watermelon juice. Soluble solids content remain almost the same in the clarified watermelon juice during MF (Chaya et al. 2008). Nanofiltration has also been able to achieve a great level of lycopene concentration during watermelon juice processing (Arriola et al., 2014). Vaillant et al. (2005) performed osmotic evaporation of melon juice and observed a loss of about 30% of phenolic compounds. They associated this loss with polyphenol oxidases present in the feed juice, which acted during processing. Bhattacharjee, Saxena, and Dutta (2017) analyzed the effect of ultrafiltration of watermelon juice on its sugar and vitamin C content. For increase in UF concentration factor, they found an increasing trend for sugar but vitamin c content decreased. The authors compared concentration factors of 1.6 and 2.5 and concluded that 1.6 will be more effective with regard to both sugar and vitamin C concentrations.

The retention of sugar in the process of clarified pineapple juice by MF and UF was studied by Carvalho et al. (2008). The researchers

**Table 3**  
Chemical and physical evaluation of single strength orange juice (feed) and concentrated juices obtained at different transmembrane pressures (Jesus et al., 2007).

	Single strength juice	Concentrated juice		
	Feed	20 bar	40 bar	60 bar
pH	4.2	4.1	4.3	4.3
Acidity (g de citric acid/100 ml)	0.4	1.0	1.4	1.8
Soluble solids (°Brix)	8.2	16.0	28.5	35.7
Pulp content (%g/g)	3.4	4.9	22.5	28.7
Viscosity (mPa s)	1.5	2.3	5.3	10.3
Vitamin C (mg de ascorbic acid/100 g)	29.3	53.9	82.7	101.1
Luminosity	14.4	11.0	7.9	7.7
<sup>a</sup> Hunter	1.0	3.0	5.2	5.8
<sup>b</sup> Hunter	9.9	7.0	4.4	4.3

L, luminosity (0 = black and 100 = white); a (– 80 to zero = green, from zero to + 100 = red); b (– 100 to zero = blue, from zero to + 70 = yellow).

found sugar content was influenced by the membrane pore size and MWCO as well as the geometry of the module. Laorko et al. (2010) performed both MF and UF of pineapple juice and found MF more suitable with the highest recovery of phytochemical compounds including vitamin C (94.3%), total phenolic content (93.4%) and DPPH free radical scavenging capacity (99.6%). UF didn't affect the total soluble solids content of pineapple juice (De Barros et al., 2003). Osmotic evaporation gave satisfactory levels of concentration with regard to soluble solids and phenolics for pineapple juice (Hongvaleerat et al., 2008).

Mirsaeedghazi, Emam-Djomeh, Mousavi, Aroujalian et al. (2010) achieved a good level of clarification of pomegranate juice using Microfiltration. Suspended solids were completely removed reducing turbidity while retaining nearly all soluble solids. Similar results were found by Cassano, Conidi, and Tasselli (2015) using UF for pomegranate juice clarification. The findings of Cassano et al. (2015) is listed in Table 4. Comparing MF and UF for pomegranate juice clarification, Mirsaeedghazi et al. (2012) concluded that MF is better with flux and fouling considerations as clarified juices from both process having similar physicochemical properties. Significant decrease in phenolic content of pomegranate juice following microfiltration was reported by Mirsaeedghazi, Emam-Djomeh, Mousavi, Ahmadvani et al. (2010), however the ratio of reduction was not reported. Individual acids such as citric acid, malic acid and quinic acid were fully retained while a decrease in antioxidant capacity in clarified pomegranate juice was observed by Bagci (2014) after UF. The author also noticed a significant reduction of total anthocyanin content following UF of raw pomegranate juice. Conidi, Cassano, Caiazza, and Drioli (2017) investigated concentration of phenolic compounds in pomegranate juice using ultrafiltration and nanofiltration membrane. They were successful in retaining a high percentage (85%) of polyphenols in the retentate portion. They performed diafiltration for recovering a high percentage of sugar in permeate and diafiltrate fraction which can be reused as food additives or as bases for soft drinks.

Microfiltration using ceramic membranes improved color and clarity of mosambi juice significantly (Nandi et al., 2009). However, the valuable properties of the juice such as pH, soluble solids, acidity, density does not vary significantly for the process. Those results match with the outcome of Rai et al. (2006), who used polymeric membrane for mosambi juice clarification. Electro-ultrafiltration also achieved a great degree of clarification of mosambi juice showing a trend of increasing clarity with the increase in electric potential (Sarkar et al., 2009). The author also observed a satisfactory level of soluble solids concentration in the clarified juice during the process.

Vaillant Jeanton, et al. (2001) evaluated the potential of osmotic evaporation for concentrating clarified passion fruit juice on an industrial scale at 30 °C, up to total soluble solids (TSS) higher than 60 °Brix. They used a pilot plant containing a 10 m<sup>2</sup> hollow-fiber module. At 40° and 60 °Brix, average evaporation fluxes of 0.65 kg/m<sup>2</sup>/h and of 0.50 kg/m<sup>2</sup>/h were obtained respectively. These concentrate values were 10 times lower than those obtained in RO for the same value of flux. Sensory quality and vitamin C content were well preserved in the concentrated juice. Shaw et al. (2001) evaluated the

retention of flavors in concentrated orange and passion fruit juices (previously clarified by MF) obtained by using a pilot-scale osmotic evaporator containing 10.3 m<sup>2</sup> of PP hollow fibers. Both juices were concentrated threefold to 33.5 and 43.5 °Brix, respectively. Their results also showed a loss of volatile compounds of about 32% and 39% in orange and passion fruit juice, respectively. Microfiltration of passion fruit juice process was able to reduce color and turbidity of the feed juice, resulting in a visually clean product (Domingues et al., 2014). Similar results were found by De Oliveira et al. (2012) by using MF for passion fruit clarification.

Grape juice concentration up to 28.5 °Brix was attained by using reverse osmosis process (Gurak, Cabral, Rocha-Leao, Matta, & Freitas, 2010). The concentrated grape juice presented an increase in total titrable acidity, anthocyanin and phenolic compound contents, color density and color index proportional to the volumetric concentration factor. Cassano et al. (2008) achieved a high degree of clarity by using UF for grape must processing. TSS and phenolic content also was satisfactory whose values decreased with increasing pressure as shown in Table 5.

The application of UF to lemon juice caused notable reductions in turbidity (99%) and viscosity (98%), subsequently achieving a high level of clarity (Maktouf et al., 2014). To use as an acidifier or flavor additive in the food industry, Saura et al. (2012) used MF and UF to clarify lemon juice. They studied different volatile fractions and found selective rejection of terpene hydrocarbons, the most abundant fraction. This de-terpenation process is of vital importance because of the negative characteristics of the terpene hydrocarbons for the aromatization of food items, e.g. they are not soluble in water and accumulate in small drops on the surface of the beverages or preservation liquid. Clarified permeate lemon juice by microfiltration presented titrable acidity, pH and TSS values comparable with those of untreated fresh lemon juice (Espamer, Pagliero, Ochoa, & Marchese, 2006). Similar results were found by Chornomaz, Pagliero, Marchese, and Ochoa (2013).

Ultrafiltration with a polyether ether ketone membrane was able to produce a clarified kiwifruit juice free of suspended solids with a small amount of 16% loss in soluble solids (Tasselli et al., 2007). The clarified juice had a large improvement in color and clarity. Cassano, Donato, et al. (2007) achieved a clarified kiwifruit juice with a 11% loss in TSS and 16% loss in ascorbic acid using ultrafiltration with a polyvinylidene fluoride membrane as the clarifying method. Bánvölgyi, Horváth, Stefanovits-Bányai, Békássy-Molnár, and Vatai (2009) evaluated the effect of concentration by reverse osmosis on the characteristics of blackcurrant juice. The applied low temperature (30 °C) in RO filtration preserved the valuable components (anthocyanins, phenols, acids, etc.) and the antioxidant capacity during the process. The initial solid content of the juice increased from 8 to 10<sup>0</sup> to 22–25<sup>0</sup>Brix in the RO concentrate. Concentrations of different physicochemical properties investigated by Bánvölgyi et al. (2009) are shown in Table 6. Microfiltration of umbu juice was able to eliminate particles in suspension and reduce pectin in permeate, producing a free of haze clarified juice. Protein was partially concentrated, and also a slightly increase of sugar content was observed in retentate (Ushikubo et al., 2007).

**Table 4**  
Analyses of polyphenols and flavonoids in samples of pomegranate juice clarified by PEEKWC and PSU HF membranes (Cassano et al., 2015).

Membrane type	Sample	Polyphenols (g/L)	Flavonoids (mg/L)	Total soluble solids (°Brix)	Suspended solids (%w/w)
PEEKWC	Feed	1.576 ± 0.03	708 ± 14.1	16.0 ± 0.10	4.9 ± 0.09
	Permeate	1.062 ± 0.02	471 ± 9.4	15.4 ± 0.25	0.0
	Retentate	2.054 ± 0.04	738 ± 14.7	16.3 ± 0.09	6.3 ± 0.12
PSU	Feed	1.571 ± 0.03	741 ± 14.8	16.0 ± 0.28	4.9 ± 0.09
	Permeate	1.177 ± 0.02	562 ± 11.2	15.4 ± 0.09	0.0
	Retentate	1.702 ± 0.03	786 ± 15.7	16.0 ± 0.16	6.9 ± 0.13

**Table 5**Physicochemical properties of untreated and clarified must at different transmembrane pressures ( $T = 15\text{ }^{\circ}\text{C}$ ;  $Q_f = 440\text{ L/h}$ ) (Cassano et al., 2008).

Sample	Color (%A <sub>420</sub> )	Clarity (%T <sub>625</sub> )	TSS (°Brix)	pH	Total phenolics (mg/L)	Acidity (% tartaric acid)
Feed	0.301	70.95	19.3	3.0	1627	0.75
Clarified must (20 kPa)	0.180	81.84	18.1	2.81	1256	0.84
Clarified must (40 kPa)	0.184	83.36	17.9	2.82	1244	0.87
Clarified must (60 kPa)	0.184	83.94	17.7	2.83	1207	0.85
Clarified must (100 kPa)	0.160	4.13	17.5	2.85	1170	0.87
Clarified must (130 kPa)	0.159	83.75	17.5	2.86	1133	0.87

**Table 6**

Concentrations of antioxidant capacity, acids, total phenolics and anthocyanins in the permeate and retentate (Banvolgyi et al., 2009).

	Antioxidant capacity (mmol AS/L)	Acid content (%)	Total phenol content (mg/L)	Anthocyanin content (mg/L)
Initial juice	21.76	0.42	2.51	1.79
UF retentate	19.28	0.42	2.95	1.88
UF permeate	11.12	0.32	0.82	0.47
RO retentate	17.20	0.83	1.49	0.61
RO permeate	0.06	0.005	0.02	0.0033

#### 5.4. Effect of membrane module in overall process efficiency and juice quality

Membrane configuration, i.e., membrane geometry and the way it is mounted and oriented in relation to the flow of fluid, is crucial in determining the overall process performance. The most used configurations for the clarification of fruit juices at industrial level are tubular (inner diameter 5–10 mm), capillary (1–1.5 mm) and plate-and-frame membrane modules. Tubular and spiral wound membrane modules have an advantage over plate and frame membrane modules as they offer efficiency of uniform flow through the lumen, allowing industrial scale-up (Curcio et al., 2001). He et al. (2007) used a rectangular design plate and frame cross-flow membrane unit for apple juice clarification and found several advantages over tubular system such as lower capital and operating cost, higher flux rate due to the unique design of the plate etc. Loyal et al. (2015) developed a lab scale dead end filtration module for fouling study in orange juice clarification and achieved good results compared to a tubular module. De Barros et al. (2003) studied cross-flow UF of depectinized pineapple juice using a tubular ceramic membrane (0.01  $\mu\text{m}$ ) and polysulfone hollow fiber membrane (100 ka). While comparing the fluxes for both modules, they found that the tubular module provided higher flux as compared to that of the hollow fiber membrane module. This can be described by the fact that the flow in turbulent regime in the tubular module increases the rate of solute diffusion from the membrane surface to the bulk which leads to less compact cake, causing a higher permeate flux compared with the flow obtained due to cake formation and the laminar flow in hollow fiber membrane. The promotion of a high degree of turbulence, high fluxes, low energetic costs per water volume unit, ease of operation and cleaning, as well as the possibility of scale up are determining factors for using a tubular membrane module in fruit juice clarification (Carvalho et al., 2008). De Oliveira et al. (2012) achieved significantly higher flux in tubular module compared to hollow fiber module for MF of passion fruit juice. Zhu et al. (2013) compared dead-end filtration with a rotating disk module for chicory juice clarification and observed that the former had showed the advantage of higher permeate flux and lower permeate turbidity, resulting from high membrane shear rate due high rotating speed, which also reduced membrane fouling and led to higher carbohydrate transmission. The experimental setup of Zhu et al. (2013) incorporating rotating disc module is shown in Fig. 5. Sarkar et al. (2009) used an electro-ultrafiltration system to analyze the effect of external d.c. electric field on the permeate flux. They observed a flux

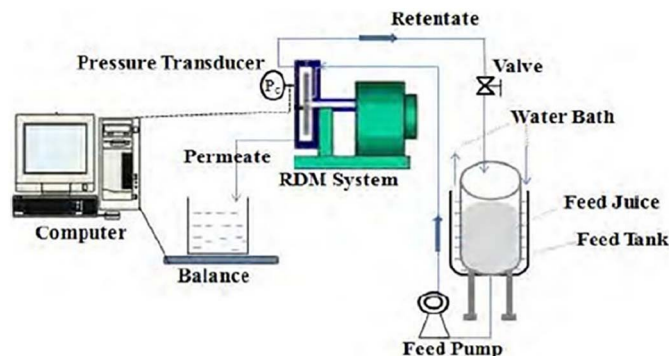


Fig. 5. Schematic diagram of the experimental set-up (Zhu et al., 2013).

enhancement of 35.8% by applying an electric field of 400 V/m for fixed values of velocity and trans-membrane pressure and clarity of the juice also improved significantly. In apple juice concentration using nanofiltration, Warczok et al. (2004) found that irreversible fouling in flat sheet membranes was 68% higher than in tubular membrane. They also concluded that for long term applications, tubular membrane modules are more appropriate because of their longer lifetime and easier membrane recovery.

#### 6. Fouling analysis/characterization in fruit juice clarification/concentration

A major limitation in applying MF and UF for fruit juice processing is the permeate flux decline due to the concentration polarization and membrane fouling (pore blocking and cake layer). While the cake layer formation due to concentration polarization is a reversible phenomenon, pore blocking is generally irreversible. A better understanding of the mechanisms of flux decline is critical for fouling control. Pore blocking methods based on Hermia models (Hermia, 1982) are used by several researchers to quantify irreversible fouling in fruit juice processing by membrane processes (Hojjatpanah et al. 2011; Nandi et al. 2012; Rai et al., 2007; Cassano, Donato et al., 2007; Cassano, Marchio et al., 2007; Mirsaedghazi, Emam-Djomeh, Mousavi, Aroujalian, & Navidbakhsh, 2009; De Barros et al., 2003). In MF of passion fruit juice, De Oliveira et al. (2012) found that internal pore blocking predominated for ceramic tubular membrane, while cake filtration dominated for the hollow fiber membrane. Nandi et al. (2012) found cake filtration to be the dominant fouling mechanism during the filtration of centrifuged and enzymatic treated orange juice by using Hermia models. Rai et al. (2007) also found gel layer formation having the main role in flux decline during the crossflow ultrafiltration of depectinized mosambi juice. Similar results of cake formation were found by Mirsaedghazi et al. (2009) by using Hermia models as shown in Fig. 6. This can be attributed to the large content of soluble solids found in fruit juices which contributes to the formation of a cake layer. Barros et al. (2002) reported that cake formation was the major fouling factor during the ultrafiltration of enzyme treated pineapple juice with polysulfone hollow fiber membranes. Standard pore blocking was found to be the major mechanism in MF of black mulberry juice clarification



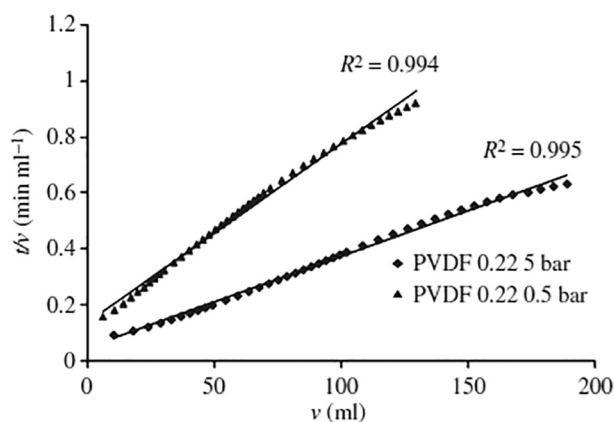


Fig. 6. The curve of  $t/v$  vs.  $v$  at different pressures in PVDF 0.22  $\mu\text{m}$  (Mirsaeedghazi et al., 2009).

by mixed cellulose ester membrane of pore sizes 0.1 and 0.22  $\mu\text{m}$  (Hojjatpanah et al., 2011). Scanning electron microscope (SEM) technique has been used by researchers to observe fouling in pores (Saha, Balakrishnan, & Ulbricht, 2007; Mirsaeedghazi, Emam-Djomeh, Mousavi, Ahmadkhaniha, et al., 2010; Mirsaeedghazi, Emam-Djomeh, Mousavi, Aroujalian, et al., 2010; Hojjatpanah et al. 2011; Warczok et al., 2004). Mathematical modeling results of pore blocking and cake formation of Hojjatpanah et al. (2011) and Mirsaeedghazi et al. (2009) were also validated by SEM analysis. Saha et al. (2007) was able to observe and analyze polysaccharide fouling in sugarcane juice UF by SEM images as shown in Fig. 7. Blocked pores and a layer of deposited particles were observed by Warczok et al. (2004) using SEM in nanofiltration membranes during apple juice concentration. Gulec, Bagci, and Bagci (2017) analyzed membrane fouling in ultrafiltration apple

juice. They measured surface roughness of membrane using atomic force microscope and from their results concluded that membranes with more hydrophobic and rougher surface had higher fouling capacity than the ones with hydrophilic and smooth surface.

Researchers have investigated the decline of permeate flux by resistance-in-series model to quantify reversible and irreversible fouling (de Bruijn et al. 2002; Cassano et al., 2008; Cassano, Donato et al., 2007; Tasselli et al., 2007; Nourbakhsh, Alemi, Emam-Djomeh, & Mirsaeedghazi, 2014; Rai et al., 2006). Nourbakhsh et al. (2014) analyzed the influence of pressure on fouling resistances during MF of red plum and watermelon juices and noticed that all resistances, including cake, reversible, and irreversible resistances, increased remarkably when the transmembrane pressure was increased. Contribution of the reversible fouling resistance was far more significant compared to irreversible one in UF of kiwifruit juice (Cassano, Donato et al., 2007). de Bruijn et al. (2002) and Tasselli et al. (2007), both found fouling resistance to be the major one compared to cake and membrane resistances in apple and kiwifruit juice clarification by UF respectively. Research of Cassano et al. (2008) concluded that intrinsic membrane resistance controlled the permeate flux in pressure controlled region while cake resistance was the dominating one in mass transfer controlled region.

Table 7 presents types of membrane modules, their properties and operating parameters used in membrane processing of fruit juices

## 7. Application of pervaporation and electro dialysis in juice processing

### 7.1. Aroma recovery using pervaporation

Membrane Processes due to their high selectivity and possibility of operation at moderate temperatures, presents a promising alternative

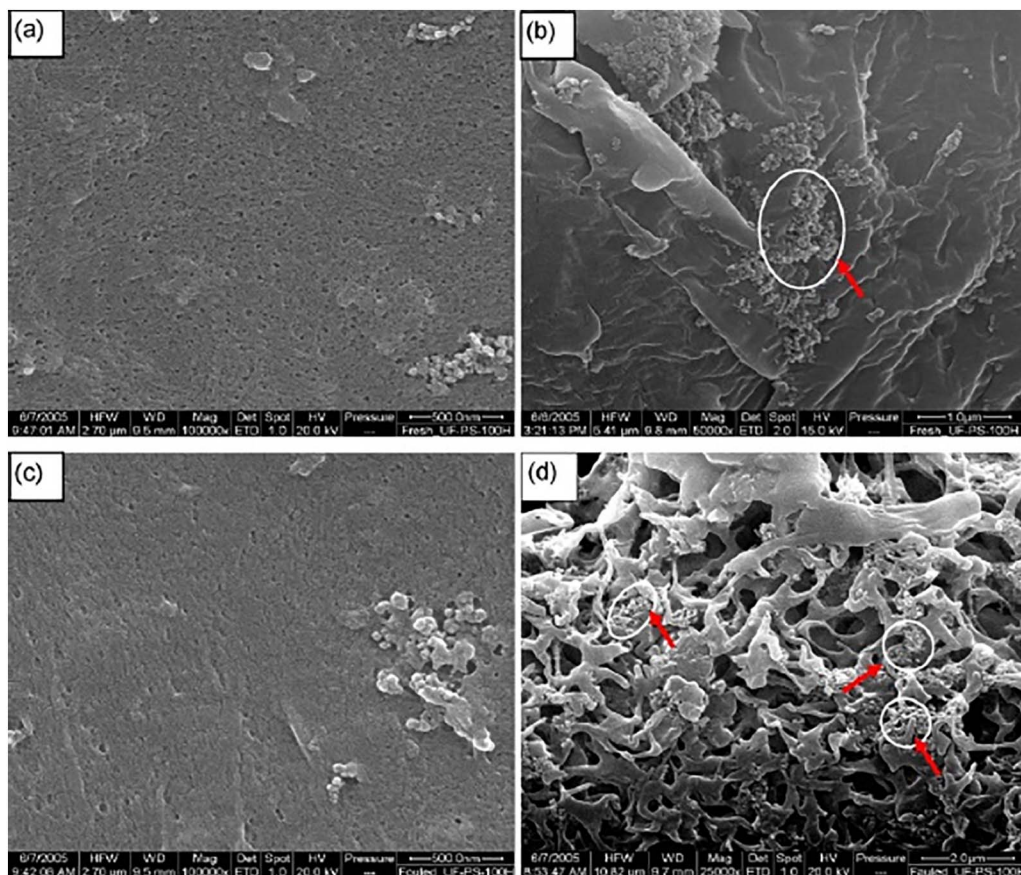


Fig. 7. SEM images of UF-PS-100H membrane: (a) pristine (surface), (b) pristine (cross-section), (c) polysaccharide fouled (surface) and (d) polysaccharide fouled (cross-section) (Saha et al., 2007).

Table 7

Literature on the types of membrane modules, their properties and operating parameters used in membrane processing of various fruit juices.

Juice	Membrane	Optimal parameters			Ref
		TMP	CFV	Temp	
Apple	Plate & frame PES, 50 kDa	1–3 bar	2.5 m/s	50 °C	He et al. (2007)
Apple	Flat plate PES, 10 & 100 kDa	1–3 bar	0.1 m/s	25 °C	Onsekizoglu et al. (2010)
Apple	Tubular Ceramic, 15 & 50 kDa	1.5 bar	7 m/s	55 °C	Bruijn et al. (2003)
Apple	Tubular Ceramic, 50 & 300 kDa	2 bar	0.5 m/s	20 °C	Vladislavjevic et al. (2003)
Apple	Tubular Polymeric, 0.3 µm	2 bar	30 °C	–	Aguier et al. (2012)
Apple	Tubular PVDF, 18 kDa	2.5 bar	1 m/s	50 °C	Yazdshenas et al. (2005)
Orange	Plate & frame PVDF/PMMA, 0.2 µm	1 bar	1.25 m/s	25 °C	Pagliari et al. (2011)
Orange	Tubular PVDF, 15 kDa	1 bar	1.5 m/s	25 °C	Cassano, Marchio et al. (2007)
Orange	Flat plate PES, 30,50 & 100 kDa	2 bar	–	24 °C	Toker et al. (2013)
Pineapple	Tubular Polysulphone, 0.3 µm	1.5 bar	–	25 °C	Carvalho et al. (2008)
Pineapple	Tubular PES, 0.3 µm	2 bar	0.5 m/s	25 °C	Carvalho et al. (2010)
Pineapple	Hollow fiber Polysulphone, 0.2 µm	1 bar	1.2 m/s	20 °C	Laorko et al. (2010)
Lemon	Plate & frame PVDF, 0.2 µm	0.8 bar	1 m/s	20 °C	Espamer et al. (2006)
Lemon	Tubular Ceramic, 15 kDa	3 bar	3 m/s	20 °C	Maktouf et al. (2014)
Lemon	Hollow fiber PVDF, 0.45 µm	1.2 bar	1.5 m/s	80 °C	Saura et al. (2012)
Melon	Tubular Ceramic, 0.2 µm	2 bar	7 m/s	35 °C	Vaillant et al. (2005)
Melon	Plate & frame PVDF, 0.22 µm	2 bar	0.5 m/s	50 °C	Nourbakhsh et al. (2014)
Melon	Tubular Ceramic, 0.1 µm	3 bar	6 m/s	30 °C	Gomes et al. (2013)
Melon	Stirred cell Cellulose acetate, 0.2 µm	2 bar	1 m/s	30 °C	Chhaya, Rai, Majumdar, Dasgupta, and De (2008)
Pomegranate	Plate and frame PVDF, 0.22 µm	0.5 bar	–	25 °C	Mirsaedghazi, Emam-Djomeh, Mousavi, Aroujalian, et al., (2010)
Pomegranate	Tubular Ceramic, 0.2 µm	3 bar	4 m/s	20 °C	Baklouti et al. (2011)
Pomegranate	Hollow fiber	2.5 bar	4 m/s	25 °C	Cassano, Conidi, and Drioli (2011)
Grape	Hollow fiber Polysulphone, 100 kDa	1 bar	0.1 m/s	35 °C	Cassano et al. (2008)
Kiwifruit	Tubular PVDF, 15 kDa	0.5 bar	1.4 m/s	20 °C	Cassano, Donato et al. (2007)
Kiwifruit	Hollow fiber Polyetherketone, 50 kDa	1 bar	1 m/s	25 °C	Tasselli et al. (2007)
Mosambi	Stirred cell Ceramic, 0.285 µm	2.5 bar	3 m/s	25 °C	Nandi et al. (2009)
Mosambi	Stirred dead end	1 bar	1.2 m/s	30 °C	Rai et al. (2006)

Table 7 (continued)

Juice	Membrane	Optimal parameters			Ref
		TMP	CFV	Temp	
	cellulose acetate, 0.2 µm				
Passion fruit	Tubular Ceramic, 0.3 µm	1 bar	2 m/s	25 °C	De Oliveira et al. (2012)
Sugarcane	Hollow fiber Polyamide, 0.4 µm	1.2 bar	1 m/s	30 °C	Rezzadori et al. (2014)
Tomato	Flat frame Module PVDF, 0.45 µm	1 bar	1.5 m/s	30 °C	Razi et al. (2011)
Umbu	Tubular Polypropylene, 0.2 µm	2 bar	0.5 m/s	35 °C	Ushikubo et al. (2007)

for aroma recovery from fruit juices (Karlsson & Tragardh, 1996). Since aroma compounds are highly heat sensitive, therefore high temperature thermal techniques are undesirable because of the loss of these compounds. Therefore pervaporation which enable separation of dilute species in liquid solutions offer a great scope for aroma recovery in beverage industry. Pervaporation has been already successfully applied to the recovery of the aroma compounds of several fruit juices such as apple (Olsson et al. 1999), kiwifruit (Cassano, Figoli, Tagarelli, Sindona, & Drioli, 2006), bergamot (Cassano, Conidi, & Drioli, 2013), strawberry (Isci, Sahin, & Sumnu, 2006), pineapple (Pereira et al., 2005), passion fruit (Pereira et al., 2005), banana (Sampranpiboon, Jiratananon, Uttapap, Feng, & Huang, 2000), orange (Shepherd, Habert, & Borges, 2002) and grape (Rajagopalan et al. 1995).

Börjesson, Karlsson, and Trägårdh (1996) analyzed the efficiency of PDMS-1060, -1070 and PT1100 membranes for recovery of apple juice aroma. They were successful in getting enrichment factors upto 1000 with PDMS proving to be the most promising membrane material for such applications. In their research, they showed that the highest enrichment was provided by esters and the least was by alcohols. Bengtsson, Trägårdh, and Hallström (1989) and Alvarez et al. (2000) also concentrated various apple juice flavor compounds by using pervaporation and found same behavior. Isci et al. (2006) performed experiments for recovering strawberry aroma compounds with the help of pervaporation with binary, tertiary and multi-component solutions. Enrichment factors for methyl and ethyl butanoate were comparatively same for binary and tertiary solutions while for multicomponent solutions, their results showed flux coupling adversely affecting the same. Pereira et al. (2005) studied pervaporation for aroma recovery of pineapple juice. They used single strength and clarified pineapple juices for investigation. The authors found very high enrichment of the most volatile components using composite ethylene-propylene-diene monomer (EPDM) hollow fiber. Their research concluded that when the organic solute concentration is reduced in the feed it is advantageous to choose a very selective polymer. Recovery of orange juice aroma components by pervaporation was studied by Aroujalian and Raisi (2007). They analyzed various parameters such as feed temperature, feed flow rate etc. on the overall efficiency of the pervaporation process. While increase in temperature helped in increasing flux and enrichment, feed flow rate didn't have much effect on both. They found highest enrichment factors for ethyl acetate while  $\alpha$ -terpineol had the lowest value for the same. Raisi, Aroujalian, and Kaghazchi (2008) were successful in concentrating aroma compounds of pomegranate juice using pervaporation. They compared POMS and PDMS membranes for the same, while POMS fared better w.r.t. enrichment, PDMS showed more acceptable flux results. In their case also, increase in feed temperature resulted in higher flux and significant levels of enrichment. Shepherd et al. (2002) studied the use of PDMS hollow fibers in orange

juice aroma recovery and found that temperature and feed flow rate had a positive effect on enrichment factors. Sampraniboon et al. (2000) used POMS and PDMS membranes to recover aroma compounds from ethyl butanoate (ETB) and ethyl hexanoate (ETH) mixtures which are dominant mainly in pineapple and banana juice. Their results showed POMS membrane to be more permselective to the aroma compounds than the PDMS membrane. Hydrophobicity also played a role in the pervaporation performance, showing higher efficiency for the more hydrophobic ETH.

## 7.2. Deacidification of fruit juices using electro dialysis

The main application of electro dialysis in juice industry is deacidification. Fruit juices are valued by purchasers for their smell and flavors, yet the high acidity of some of them confines their utilization as a component in the formulation of various preparations such as beverages, ice creams, marmalades or cocktails (Vera et al., 2007b). The juice extracts from orange, grape, pineapple, and lemon are highly acidic. Acid concentrations of 1.0–1.2% in orange, grape, and pineapple juices interfere with utilization of these juices in single-strength or concentrated forms (Vera et al., 2009). Organic acids such as citric present in high concentration in lemon, orange, pineapple, and passion fruit juices or malic in apple and grape juices are responsible for fruit juices acidity. The sourness or sweetness in the juices is related to the ratio of soluble solids (sugars) to acids in the juice. In the juice industry, the ratio of soluble solids to acid in the juice is called the Brix/acid ratio. A high Brix/acid ratio is desirable in juices for taste and storage purpose. It can be effectively done by minimizing the acid content of the juice using electro dialysis.

Conventional electro dialysis was recommended for deacidifying several fruit juices such as orange, pineapple, grape (Adhikary, Harkare, Govindan, & Nanjundaswamy, 1983), mandarin orange (Kang & Rhee, 2002), and clarified passion fruit (Vera et al., 2003b) juices. Results of Kang and Rhee (2002) showed that total acidity was reduced by almost 30% with almost minimal changes in vitamin C and flavonoid content. Vera et al. (2003b) too found decrease in titratable acidity in case of passion fruit. They also found the acid strength to be decreasing which they associated with the conventional configuration enhancing the dissociation equilibrium of the weak citric acid. Vera et al. (2009) tested electro dialysis with bipolar membranes for removing citric acid from passion fruit juice. The authors found satisfactory results with deacidification up to a pH of 4.5 were achieved. The physicochemical properties were not affected in the process while a minimal color change was observed. After comparing both the conventional and bipolar electro dialysis (Vera et al., 2003a, 2003b, 2009) concluded that simultaneous production of organic acid in the bipolar system balances the higher equipment cost of the same than the conventional one. Therefore, electro dialysis with bipolar membranes could be an environmentally friendly alternative to the conventional techniques for the deacidification of fruit juices. Rozoy, Boudesocque, and

Bazinet (2015) studied electro dialysis with bipolar membranes (EDBM) for deacidifying cranberry juice. Their experiment was successful in increasing the pH of the juice from 2.4 to 2.7 while deacidification rate was 22.84%. They also concluded that this rate can further be improved by increasing the number of membranes stacked in the module. Research of Serre, Rozoy, Pedneault, Lacour, and Bazinet (2016) found bipolar and anion-exchange membranes (ED2MB) most efficient for deacidification of cranberry juice with a rate of 40% in 3 h. They also recovered purified organic acids, or mixed organic acids in the recovery solution which can be used as preservative and or flavoring agents, in various food applications. The current efficiency for an electro dialysis system in the deacidification of fruit juice is from 52 to 90% depending on the quality of the juice. (Vera et al., 2007a, 2007b)

## 8. Membrane distillation in fruit juice concentration

Membrane distillation (MD) is a temperature driven process in which two liquid solutions, at different temperatures, are separated by a microporous hydrophobic membrane. Therefore, liquid-vapor interfaces are formed at the entrances of each pore. The hydrophobic nature of the membrane prevents penetration of the pores by aqueous solutions due to the surface-tension forces. In these conditions, a water-vapor transfer from the warm side to the cold one occurs. Vapor-pressure gradient between the two solutions separated by the membrane, generated by a temperature difference is the driving force of the process.

One of the prime benefits of MD is that it can be operated at atmospheric pressure and operating temperature is much lower than the boiling point of the solutions. Therefore it is very efficient in concentrating fruit juices which are sensitive to high temperature. Fixed costs and mechanical requirements on the membrane are greatly reduced due to lower pressure requirements. These features make MD ideal for the treatment of food and pharmaceutical solutions.

Although MD holds a good promise as an alternative to the present pressure-driven processes, it is still not fully commercialized in industrial setting due to the following issues:

- Lower permeate flux compared to RO
- Temperature polarization causing flux decay
- Module design
- Highly energy intensive

Table 8 shows some selected MD applications in fruit-juice processing: they refer to the concentration of clarified juices and to the recovery of aroma compounds by using DCMD and VMD configurations.

Drioli, Jiao, and Calabrò (1992) and Calabro et al. (1994) first studied the applicability of MD in fruit juice concentration by integrated membrane systems. They also considered the effect of viscosity and the necessity of juice pretreatment. Commercial plate PVDF membranes were used for the concentration of single-strength orange

**Table 8**  
MD applications in fruit juice processing.

Fruit juice	Membrane type	MD configuration	References
Apple	Enka Microdyn, hollow fiber, polypropylene	DCMD	Lagana, Barbieri, and Drioli (2000)
Apple (clarified by UF)	MPK3, flat sheet, PVDF	DCMD	Gunko, Verbych, Bryk, and Hilal (2006)
Blackcurrant (clarified by UF)	K150, flat sheet, PTFE	VMD	Bagger-Jorgensen et al. (2004)
Blackcurrant (clarified by UF & preconcentrated by RO)	Hollow fiber, polypropylene	DCMD	Kozak, Bekassy-Molnar, and Vatai (2009)
Orange juice (diluted from commercial concentrate)	Millipore, flat sheet, PVDF; Gelman, G0712, flat sheet; Enka, hollow fiber, polypropylene	DCMD	Calabro et al. (1994)
Pear (model solution)	Enka-Mycrodin, MD020TP 2 N, hollow fiber, polypropylene	VMD	Diban, Voinea, Urteaga, and Ortiz (2009)
Apple (diluted from commercial concentrate)	Enka Microdyn, hollow fiber, polypropylene	DCMD	Curcio et al. (2005)

**Table 9**Main characteristics of the pineapple juices before and after concentration by osmotic evaporation (mean  $\pm$  standard deviation on 2 trials) (Hongvaleerat et al., 2008).

	Single strength juice				Clarified juice			
	First stage		Second stage		First stage		Second stage	
	Feed	Concentrate	Feed	Concentrate	Feed	Concentrate	Feed	Concentrate
Total soluble solids (g 100/g)	12.6 $\pm$ 0.1	29.0 $\pm$ 1.4	31.3 $\pm$ 2.5	56.7 $\pm$ 1.8	10.6 $\pm$ 0.6	27.8 $\pm$ 0.4	30.2 $\pm$ 1.1	55.5 $\pm$ 3.5
a <sub>w</sub>	0.99 $\pm$ 0.01	0.97 $\pm$ 0.01	0.96 $\pm$ 0.00	0.90 $\pm$ 0.02	0.99 $\pm$ 0.01	0.98 $\pm$ 0.01	0.98 $\pm$ 0.01	0.92 $\pm$ 0.06
pH	3.77 $\pm$ 0.21	3.71 $\pm$ 0.31	3.70 $\pm$ 0.23	3.68 $\pm$ 0.29	3.96 $\pm$ 0.01	3.92 $\pm$ 0.02	3.88 $\pm$ 0.02	3.85 $\pm$ 0.02
Titrateable acidity (eq/L)	0.83 $\pm$ 0.18	1.63 $\pm$ 0.32	2.38 $\pm$ 0.25	4.00 $\pm$ 0.14	0.70 $\pm$ 0.14	1.80 $\pm$ 0.42	2.23 $\pm$ 0.60	3.90 $\pm$ 0.99
Total phenolic content (mg 100/g)	18.6	46.3	61.3	106.2	4.9	42.9	47.2	112.3
L	34.33 $\pm$ 0.87	33.43 $\pm$ 0.23	33.08 $\pm$ 3.34	32.84 $\pm$ 5.30	29.96 $\pm$ 0.17	28.18 $\pm$ 0.61	28.77 $\pm$ 0.48	26.10 $\pm$ 1.16
a	-1.82 $\pm$ 0.54	-1.45 $\pm$ 0.23	-1.40 $\pm$ 1.15	-0.74 $\pm$ 0.11	-0.15 $\pm$ 0.19	0.44 $\pm$ 0.19	0.48 $\pm$ 0.21	1.57 $\pm$ 0.02
b	4.61 $\pm$ 1.03	5.65 $\pm$ 0.80	4.13 $\pm$ 1.68	3.35 $\pm$ 0.20	2.90 $\pm$ 0.30	4.11 $\pm$ 0.75	5.84 $\pm$ 0.27	2.76 $\pm$ 1.55

juice with a TSS content of 10.8<sup>0</sup> Brix. The percentage reduction of flux was 50% when the juice was concentrated up to 31<sup>0</sup> Brix at a trans-membrane temperature gradient of 20<sup>0</sup>C. They found a very good retention of soluble solids, sugars and organic acids with rejection of sugars and organic acids equal to 100%. The observed reduction of vitamin C of about 42% was associated to high temperature and oxidation. They also found the color and flavor of the concentrated juice satisfactory. The pretreatment of the juice by UF helped in removing pulp and pectin which led to a clarified juice with a lower viscosity compared with the single-strength juice.

Researchers have shown that the combination of MD and pressure driven membrane separation processes offers important benefits over single use of MD in the concentration of various types of juices including grape juice (Rektor et al., 2006), pineapple juice (Hongvaleerat et al., 2008), kiwi fruit juice (Cassano & Drioli, 2007), camu-camu juice (Rodrigues et al., 2004), sugarcane juice (Nene et al. 2004) and cactus pear juice (Cassano, Conidi, et al., 2007). The effect of osmotic evaporation on components of single strength pineapple juice is shown in Table 9 (Hongvaleerat et al., 2008). Combination of MD with other membrane operations such as MF, UF, NF, RO and OD helps in achieving high quality fruit juice concentrates with higher economic feasibility. Kozak et al. (2009) performed pretreatment using enzymatic treatment, MF and RO of black currant juice and used DCMD in order to further concentrate the juice. Pretreatment increased the concentration from 15 to 22 °Brix. DCMD helped in concentrating further until 58 °Brix using a polypropylene membrane and a temperature difference of 19 °C (feed temperature 30 °C). For the parameters they analyzed, the concentrations were directly proportional to the increase of TSS in the juice, which indicated that retentions were quite high. Effect of temperature gradient on TSS content is shown in Fig. 8. Direct contact membrane distillation (DCMD) was applied for the concentration of apple juice using a polyvinylidene fluoride membrane by Gunko et al.

(2006). The pretreatment was done using an enzymatic step followed by clarification using ultrafiltration. A TSS content of 50 °Brix was obtained when the permeate flux reached about 9 L/m<sup>2</sup>/h. Reduced productivity in terms of flux decay was observed beyond further concentration to 60–65 °Brix. Decreasing the cooling water temperature and maintaining a constant juice temperature in the hot cell had a significant effect on flux improvement. Similar flux enhancement was also noticed due to the pretreatment that lead to a lower viscosity and thus concentration and temperature polarization.

Lagana et al. (2000) produced highly concentrated apple juices up to 64 °Brix using polypropylene hollow-fiber DCMD modules with tube and shell configuration. They showed that flux rates were dependent essentially upon temperature polarization phenomena located mainly on the feed side, rather than concentration polarization which is insignificant. Temperature polarization becomes more prone to higher feed temperatures. Similar results were found by Curcio et al. (2000).

Bagger-Jorgensen, Meyer, Varming, and Jonsson (2004) illustrated the use of MD to recover and concentrate selectively volatile aroma compounds from black currant juice. The clarification step was performed using depectinization, clarified with gelatin-silica sol, centrifugation and finally ultrafiltration. In order to obtain a concentrated permeate, a vacuum membrane distillation (VMD) configuration was chosen and was performed at low temperatures (10–45 °C) by using a flat PTFE membrane. They observed that low temperature was suitable for obtaining highest concentration factors for the blackcurrant aroma compounds. They were able to recover up to 83% of the components, whereby a maximum concentration factor 31 was obtained. Cane sugar concentration was done using DCMD by Nene, Kaur, Sumod, Joshi, and Raghavarao (2002). The initial feed concentration was 20 °Brix. They used a polypropylene membrane and a feed temperature of 70 °C. A pretreatment with microfiltration didn't resulted in flux improvement, which the author attributed to the higher polysaccharide content of the micro-filtered cane sugar fraction than the raw sugar which resulted in an increased concentration polarization. Quist-Jensen et al. (2016) tested DCMD for concentrating clarified blood orange juice. Their two step DCMD process was successful in achieving a final concentration of 65 °Brix. They also reported satisfactory levels of phenolics and antioxidant activity in the final product.

### 8.1. Effect of process parameters on membrane distillation

Permeate fluxes in MD are affected by different operating conditions such as: feed concentration, operating temperature, feed circulation velocity, temperature difference, permeate inlet temperature, flow velocity and vapor-pressure difference (Cassano & Drioli 2010). Permeate flux decreases with an increase in feed concentration (Souhaimi & Matsuura, 2011), which can be attributed to the reduction of the driving force due to declination of the feed vapor pressure. Increase of viscosity of the feed with increasing concentration also act as a factor (Onsekizoglu et al. 2015). The contribution of concentration

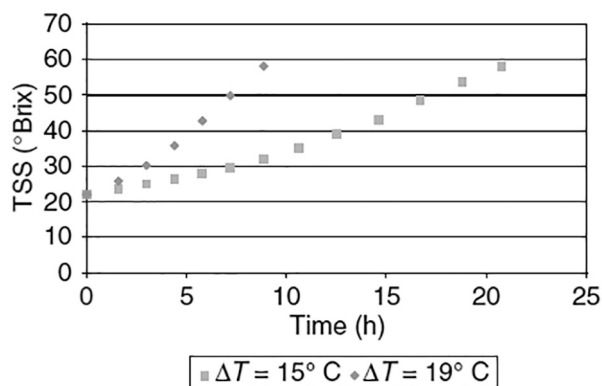


Fig. 8. TSS of the black-currant juice in function of time during the concentration with MD using different temperature differences (Kozak et al., 2009).

polarization compared with temperature polarization effects is very minimal (Lagana et al., 2000). MD can be effectively applied for fruit juice concentration, where high retentate concentrations are desired as it can deal with highly concentrated feed solutions without suffering a major drop in permeability. This comes as an advantage over pressure driven membrane separation processes (Curcio & Drioli, 2005). Onsekizoglu et al. (2010) observed that the feed flow rate has minimal effect on transmembrane flux compared to temperature difference across the membrane during apple juice concentration using membrane distillation. The effect of flow rate on MD flux becomes more noticeable at higher temperatures especially associated with higher temperature drop across the membrane (Walton, Lu, Turner, Solis, & Hein, 2004). Increase in permeate flow and/or stirring rate helps in reducing the temperature polarization effect which ultimately leads to approaching of gas/liquid interface temperature to the bulk temperature at the permeate side, resulting in an increase in the driving force and MD flux (Hongvaleerat et al., 2008). In DCMD applications, increasing the permeate temperature is directly linked to a reduction in permeate flux which is attributed to the decrease of the transmembrane vapor pressure as long as the feed temperature is maintained constant (Lagana et al., 2000). Research of Quist-Jensen et al. (2016) correlated the evaporation flux decay in the pre-concentration step to the reduction of average temperature difference between the feed and permeate side while in the final concentration step, it was primarily affected by the increase in juice viscosity.

## 9. Forward osmosis (FO) concentration of fruit juices

Forward Osmosis comprises of a semi-permeable dense hydrophilic membrane, which separates two aqueous solutions (feed and draw solutions) having different osmotic pressures that acts as a driving force. The water transfer occurs from the feed side (low concentration) to the draw solution side (high concentration) across a semi-permeable membrane till the osmotic pressure difference between both sides is close to zero (Shaffer, Werber, Jaramillo, Lin, & Elimelech, 2015). The forward osmosis can be performed even at ambient pressure and temperature leading to the higher retention of thermo-labile components while the product can be concentrated up to higher concentration (up to 60 °Brix) (Sant'Anna, Marczak, & Tessaro, 2012). In the fruit juice industry, compared to thermal concentration techniques, FO can help in achieving an acceptable level of physicochemical and sensory properties without deteriorating its quality (Petrotos et al. 2001).

Wrostad et al. (1993) analyzed FO for concentrating raspberry juice using corn syrup as the draw solution. Their result showed that FO concentrated juice was strong in raspberry aroma and flavor and were comparable to some commercial samples. The final concentration of the juice was 45 °Brix. Herron, Beaudry, Jochums, and Medina (1994) used fructose (74 °Brix) as osmotic agent for concentrating orange juice using FO. They obtained a maximum osmotic flux of 4 kg/m<sup>2</sup>/h and the quality of the final concentrated juice was superior when compared to the one concentrated by thermal evaporation. Petrotos, Quantick, and Petropakis (1998) successfully used FO for concentrating UF clarified tomato juice upto 52 °Brix using NaCl as draw solution. Babu, Rastogi, and Raghavarao (2006) used forward osmosis using mixed osmotic agent (sucrose 40% (w/w) and sodium chloride 12% (w/w)) for the concentration of pineapple juice up to 60 °Brix. The sucrose–sodium chloride combination was able to overcome the drawback of sucrose (low flux) and sodium chloride (salt migration) as single osmotic agents during direct osmosis process. They found satisfying results regarding the characteristics of the juice as shown in Table 10. Garcia-Castello et al. (2011) investigated the potential of FO for concentrating orange liquor solution using sodium chloride as draw solution. The TSS of the liquor increased from 8 to 10.5 °Brix. Their research showed that pectin was the main component that causes fouling, resulting in substantial decline in flux. Nayak, Valluri, and Rastogi (2011) concentrated pineapple and grape juice using FO. For the grape juice, anthocyanins and

**Table 10**  
Comparison of physico-chemical characteristics of pineapple juices (Babu et al., 2006).

Characteristic	Fresh juice	DO juice concentrate	Reconstituted juice
pH	3.62 ± 0.10	3.85 ± 0.10	3.70 ± 0.10
Titrate acidity (% w/w citric acid)	0.80 ± 0.10	2.50 ± 0.20	0.75 ± 0.10
Ascorbic acid (mg/100 ml)	12.50 ± 1.0	45.0 ± 2.0	12.10 ± 1.0
°Brix	12.40 ± 0.10	60.0 ± 0.20	12.4 ± 0.20
Density (kg/m <sup>3</sup> )	1060 ± 2.0	1260 ± 4.0	1070 ± 4.0
Viscosity (mPa s)	1.40 ± 0.20	35 ± 2.0	1.60 ± 0.20
NaCl concentration (%)	–	1.70 ± 0.02	0.58 ± 0.02
L*	40.18 ± 1.0	25.34 ± 1.0	39.14 ± 1.0
a*	3.64 ± 0.6	7.84 ± 0.6	3.87 ± 0.3
b*	19.83 ± 1.0	13.49 ± 1.0	19.44 ± 1.0
Hue angle (H°)	79.60 ± 1.2	59.84 ± 0.06	78.74 ± 0.3
Color purity (C°)	20.17 ± 1.1	15.60 ± 1.2	19.82 ± 1.1

TSS were concentrated from 105 to 715 mg/L and from 8 to 54.6 °Brix, respectively while for pineapple juice, the TSS concentration increased from 4.4 to 54 °Brix. Shalini et al. (2016) concentrated raw sugarcane juice from 17.6 °Brix to 31.7 °Brix by using forward osmosis. They found better results w.r.t. color and flavor when compared to thermal evaporation.

## 10. Integrated membrane processes for juice concentration

Membrane-based approaches can provide an essential contribution to the concept of process intensification, which may lead to even larger performance benefits with regard to the fruit juice processing industry. The integration or the substitution of various traditional operations with innovative membrane based techniques permits the rationalization of direct and indirect energy consumption improving at the same time the organoleptic properties of the finished product. Integration of these membrane methods can help in reducing constraints, waste generation (Stankiewicz et al. 2000) and energy consumption which will improve economic viability of these processes (Alvarez et al., 2000; Sotof, Christensen, Andréßen, & Norddahl, 2012). A general flow sheet of an integrated membrane process for the clarification and concentration of fruit juices is illustrated in Fig. 9. The process includes a preconcentration step based on the use of RO membranes followed by a final concentration by OD.

In recent years, researchers have analyzed integration of numerous membrane based methods for processing various fruit juices. Alvarez et al. (2000) used an enzymatic membrane reactor (EMR) for clarifying apple juice and RO for preconcentration and aroma recovery from the preconcentrated juice and a final concentration step up to 72 °Brix by using conventional evaporation. They were successful in retaining a high percentage of sugar and polyphenols in the preconcentrated juice and also achieved a high level of aroma enrichment. Cassano, Jiao, and Drioli (2004) investigated integrated membrane process for the production of kiwi fruit juice concentrate. They performed UF for clarification and OD for concentration. They achieved a final concentration of 60 °Brix and a high percentage of vitamin C was retained in the concentrate. Cisse, Vaillant, Perez, Dornier, and Reynes (2005) used MF for clarifying orange juice and used OD for concentrating the clarified juice. They were able to concentrate the juice upto 62 °Brix with minimal declination of evaporation flux. Koroknai, Csanádi, Gubicza, and Bélafi-Bakó (2008) used UF for clarifying three types of red juices (chokeberry, redcurrant and cherry) and coupled MD and OD for further concentration. Because of this coupling of MD and OD, they achieved an enhanced water flux due to an increase of the driving force. They were able to retain a high percentage of antioxidant activity in the product juice. This coupled operation of MD and OD produces more

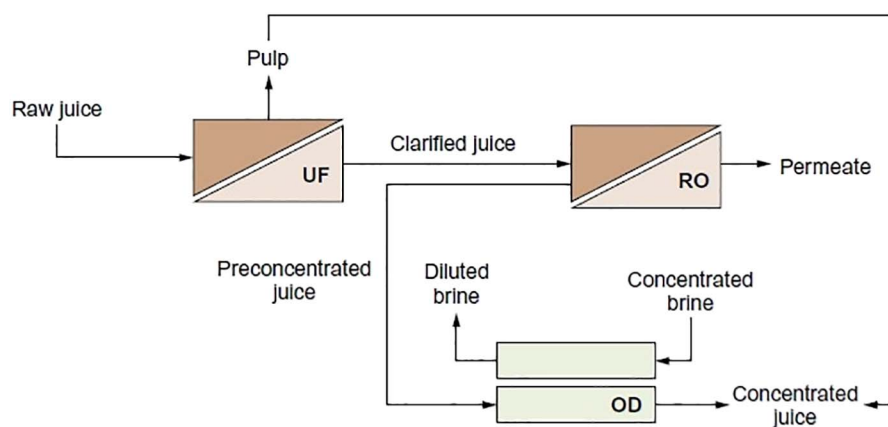


Fig. 9. Flow sheet of integrated membrane process for the clarification and concentration of fruit juices.

efficiency than single use of any of them (Bélafi-Bakó & Koroknai, 2006). Cassano et al. (2013) used UF and OD for clarification and concentration of bergamot juice and found that the concentrated juice was able to retain antioxidant properties of the fresh juice. Integrated membrane processes have also been analyzed for the clarification and concentration of tropical juices such as camu-camu (Souza et al., 2013) and acerola (Pagani et al., 2011) and were successful in concentrating the juices upto a TSS content of 53–55 °Brix after final concentration with OD with no losses of vitamin C content and antioxidant activity. Sotoft et al. (2012) used RO/NF, DCMD and VMD for preconcentration, final concentration and aroma recovery respectively of blackcurrant juice. By combining NF with RO, they were able to overcome the high osmotic pressure limitations presented by RO. The DCMD step was able to concentrate the juice upto 70 °Brix. Chaparro et al. (2016) used combination of enzymatic maceration, microfiltration, diafiltration and centrifugation to extract and purify lycopene from watermelon juice. Their integrated process obtained a natural extract of lycopene that was 41 times more concentrated and 34 times purer than the initial juice, yielding an extract with up to 2% all-trans-lycopene on a dry basis. Oliveira et al. (2016) coupled microfiltration, diafiltration and reverse osmosis and were successful in concentrating lycopene and partitioning the sugars present in watermelon juice in order to obtain a novel extract. The lycopene content of the product juice was 17.7 times higher than the fresh juice. Antioxidant capacity also increased and the sugar content decreased due to the diafiltration step. Carotenoids profile and color parameters of the reversed osmosis extract is listed in Table 11.

### 11. Economic feasibility of integrated membrane processes

Researchers have analyzed economic feasibility of integrating various membrane methods for fruit juice processing and found positive results. Molinari, Gagliardi, and Drioli (1995) used substitution coefficient (CS) for calculating energy savings in membrane operations. Substitution coefficient is defined as the ratio between the primary

energy (thermal) saved in the new process with respect to the conventional process and the amount of electrical energy consumed, relative to the conventional process and is mathematically defined as

$$CS = \frac{C_1 - C_2}{E_2 - E_1}$$

where  $C$  is the consumption of thermal primary energy (MJ or Mcal),  $E$  is the consumption of electrical energy (kWh), and 1 and 2 are the relative indexes of the conventional and innovating process, respectively. The author found high values for energy savings in membrane processing of tomato ( $CS = 137.9$  MJ/kWh) and orange ( $CS = 52.5$ – $766.5$  MJ/kWh) juice when compared with thermal evaporation. An economic evaluation made by Alvarez et al. (2000) of the integrated membrane system for apple juice concentration indicated a reduction of the total capital investment of 14% and an increase in process yield of 5% when compared with the conventional process. Total manufacturing costs decreased by 8% because less energy was required to concentrate the juice. Membrane replacement accounted only for 2% of operating costs and membrane life was estimated to be 2, 3 and 2 years for UF, RO and PV membranes, respectively. The cost comparison of conventional and integrated membrane process is shown in Table 12. For black currant juice concentration, Sotoft et al. (2012) used integrated membrane systems comprising of NF, RO, DCMD and VMD for aroma recovery. They found that the estimated operation cost is lower than the price of a traditional process by about 43% and concluded that the economical potential of the process is very promising in order to replace conventional evaporators. Hogan, Canning, Peterson, Johnson, and Michaels (1998) reported a total process cost of OD concentration in the order of \$1.00/l of concentrate. From 1 L of fresh juice, it is possible to achieve about 200 ml of 70 °Brix concentrate. The value of this concentrate is between \$2.50 and \$7.50/L. From these data, the economical benefits of the integrated membrane process seem evident.

### 12. Major membrane suppliers in the juice industry

There are numerous membrane and membrane module manufacturers and suppliers around the world. The main suppliers for the juice industry are Alfa Laval, GEA Filtration, GE Osmonics, Ionics Inc., Koch Membrane Systems, Pall Corp., Sartorius AG etc.

### 13. Critical observations

Pretreatment of pectin containing juices using enzymatic treatment helps in minimizing gel/cake layer formation and subsequently fouling in membrane based clarification processes. Microfiltration can be used as an effective pretreatment technique for further concentration using RO and membrane distillation methods. Microfiltration and Ultrafiltration are very successful in removing suspended solids, hence

Table 11

Carotenoids profile and color parameters of the reversed osmosis extract<sup>1</sup> (Oliveira et al. 2016).

Analysis	Concentrated extract
Total carotenoids (µg/g)	808.07 ± 39.89
β-Carotene (µg/g)	50.69 ± 0.01
Lycopene (µg/g)	723.45 ± 38.33
L*	37.09 ± 0.17
a*	21.14 ± 0.26
b*	7.72 ± 0.15
C*	22.50 ± 0.30
h	20.06 ± 0.14

<sup>1</sup> = Mean of 3 determinations.

<sup>1</sup> = Carotenoids determined by HPLC analysis.

**Table 12**  
Capital investment and manufacturing costs for the conventional and integrated membrane process (Alvarez et al., 2000).

Item	Cost (EURO)	
	Conventional process	Membrane process
<b>Investment</b>		
Apple storage	$1.7 \times 10^5$	$1.7 \times 10^5$
Washing and inspecting apples	$0.1 \times 10^5$	$0.1 \times 10^5$
Milling apples	$0.4 \times 10^5$	$0.1 \times 10^5$
Clarification	$6.4 \times 10^5$	$3.9 \times 10^5$
Preconcentration (RO)		$1.3 \times 10^5$
Aroma compounds recovery and apple juice concentration	$4.2 \times 10^5$	$5.1 \times 10^5$
<b>Total</b>	$13.73 \times 10^5$	$12.48 \times 10^5$
Total capital investment	$47.72 \times 10^5$	$43.38 \times 10^5$
<b>Operating costs</b>		
Raw material (apples)	810.0 EURO/ton conc.	810.0 EURO/ton conc.
Membranes		19.7 EURO/ton conc.
Others	99.9 EURO/ton conc.	50.2 EURO/ton conc.
Total variable cost	909.9 EURO/ton conc.	839.9 EURO/ton conc.
Labor, maintenance and other fixed costs	151.9 EURO/ton conc.	145.0 EURO/ton conc.
Total manufacturing costs	1068.8 EURO/ton conc.	984.9 EURO/ton conc.

turbidity of fruit juices. They improve clarity of juices significantly. Soluble solids content in the clarified juices is not much affected by both MF and UF and the slight decrease can be attributed to the removal of suspended solids. Various authors have reported a higher value of soluble solids in the retentate side during MF and UF of fruit juices and linked it to the presence of high suspended solids content in the pulpy products, interfering with the measurement of refractive index. Acid content measured as titratable acidity and pH largely remains unaffected in juices clarified by MF and UF. Ascorbic acid loss has been observed in RO and UF of fruit juices which can be associated with the possible occurrence of oxidative reactions during concentration, as these processes run for a long time. Loss of phenolic compound is also noticed in some cases, but is minimal compared to antioxidants. Flux decline with time due to fouling remain one of the main challenges for fruit juice processing using membrane technology, though various flux enhancement techniques such as use of turbulence promoters, gas Sparging, back flushing, application of ultrasonic and electric field, shear enhanced modules etc. are successful in mitigating fouling affects. Low evaporation fluxes in MD seem to be the main drawbacks when compared with RO and thermal evaporation. Theoretical 100% rejection to nonvolatile solutes is one of the major advantages of membrane distillation. For fruit juice concentration, recent research shows that coupled operation of MD and OD can favourably deal with high temperature related problems (i.e. aroma and color loss) prevalent in MD. Also, utilization of low-grade waste and/or alternative energy sources for MD can be another promising area of research due to its ability to effectively operate at low temperatures. For Forward osmosis, recovery and regeneration of the draw solution can be construed as the one of the most significant limitations in transforming forward osmosis into a full-scale process in the juice industry.

#### 14. Conclusion

The demand for healthy food products from diet and fitness conscious consumers is one of the leading drivers of the global juice market. Thus, the global market for juice is likely to witness strong growth over the forthcoming years. The sustained expansion of this market is associated with growing opportunities for fruit juice

processing industries and food scientists to develop innovative methods in order to retain as much as possible the originality of fresh fruit w.r.t. color, aroma, nutritional value and structural characteristics. The potential of membrane technologies in the food and beverage industries is widely recognized today. One of the challenges of membrane technology for juice processing is scale up of laboratory modules to pilot plant studies, although some recent research has been done, but long term suitability has not been evaluated. Minimization of waste generated is another area which promises some research, although membrane methods generate very low waste compared to traditional methods. Safety aspects regarding stability and transport are also some important factors which needs attention.

Some of the main issues hindering the expansion of membrane operations for juice processing, such as MF and UF in the clarification of fruit juices, are basically related to membrane fouling. Fouling results in decrease of permeate flux and also reduces membrane life span. Innovation in cleaning methods can help in wide applicability of these methods in the juice industry. Surface modification of membranes is another area which can enable low fouling membranes to come into the picture. Ceramic membranes provide some advantages over polymeric membranes, but they are limited to small-scale applications because of their high costs, although research is going on for developing low cost ceramic materials and their applicability for juice processing. Development of new antifouling materials for membrane, module design, novel cleaning methods are some important areas of investigation for the sustainable growth of membrane operations in the clarification/concentration of fruit juices and beverages.

#### Abbreviations

UF	ultrafiltration
MF	microfiltration
MWCO	molecular weight cut off
SS	suspended solids
RO	reverse osmosis
OD	osmotic distillation
MD	membrane distillation
NF	nanofiltration
DE	diatomaceous earth
ED	electrodialysis
TMP	transmembrane pressure
VCF	volume concentration factor
TSS	total soluble solids
OE	osmotic evaporation
PVDF	polyvinylidene fluoride
TAC	total anthocyanin content
AA	ascorbic acid
TAA	total antioxidant activity
PES	polyethersulphone
HPLC	high performance liquid chromatography
DPPH	2, 2-diphenyl-1-picrylhydrazyl
SEM	scanning electron microscope
PEEK	poly (ether ether ketone)
PTFE	polytetrafluoroethylene
PP	polypropylene
DCMD	direct contact membrane distillation
VMD	vacuum membrane distillation
PV	pervaporation
FO	forward osmosis

#### Acknowledgement

The authors want to thank Indian Institute of Technology (Indian School of Mines), Dhanbad, India for providing necessary facilities to carry out this work.

## References

- Adhikary, S. K., Harkare, W. P., Govindan, K. P., & Nanjundaswamy, A. M. (1983). Deacidification of fruit juices by electrodialysis. *Indian Journal of Technology*, 21, 120–123.
- Aguiar, I. B., Miranda, N. G. M., Gomes, F. S., Santos, M. C. S., Freitas, D. G. C., Tonon, R. V., & Cabral, L. M. C. (2012). Physicochemical and sensory properties of apple juice concentrated by reverse osmosis and osmotic evaporation. *Innovative Food Science & Emerging Technologies*, 16, 137–142.
- Alvarez, S., Alvarez, R., Riera, F. A., & Coca, J. (1998). Influence of depectinization on apple juice ultrafiltration. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 138(2–3), 377–382.
- Alvarez, S., Riera, F. A., Alvarez, R., Coca, J., Cuperus, F. P., Bouwer, S. T., ... Donato, L. (2000). A new integrated membrane process for producing clarified apple juice and apple juice aroma concentrate. *Journal of Food Engineering*, 46(2), 109–125.
- Andres, L. J., Riera, F. A., & Alvarez, R. (1995). Skimmed milk demineralization by electrodialysis: Conventional versus selective membranes. *Journal of Food Engineering*, 26, 57–66.
- Aroujalian, A., & Raisi, A. (2007). Recovery of volatile aroma components from orange juice by pervaporation. *Journal of Membrane Science*, 303(1), 154–161.
- Arriola, N. A., Dos-Santos, G. D., Prudencio, E. S., Vitali, L., Petrus, J. C. C., & Amboni, R. D. M. C. (2014). Potential of nanofiltration for the concentration of bioactive compounds from watermelon juice. *International Journal of Food Science and Technology*, 49(9), 2052–2060.
- Babu, B. R., Rastogi, N. K., & Raghavarao, K. S. M. S. (2006). Effect of process parameters on transmembrane flux during direct osmosis. *Journal of Membrane Science*, 280, 185–194.
- Bagci, P. O. (2014). Effective clarification of pomegranate juice: A comparative study of pretreatment methods and their influence on ultrafiltration flux. *Journal of Food Engineering*, 141, 58–64.
- Bagger-Jorgensen, R., Meyer, A. S., Varming, C., & Jonsson, G. (2004). Recovery of volatile aroma compounds from black currant juice by vacuum membrane distillation. *Journal of Food Engineering*, 64(1), 23–31.
- Baklouti, S., Ellouze-Ghorbel, R., Mokni, A., & Chaabouni, S. (2011). Clarification of pomegranate juice by ultrafiltration: Study of juice quality and of the fouling mechanism. *Fruits*, 67(3), 215–225.
- Bánvölgyi, S., Horváth, S., Stefanovits-Bányai, É., Békássy-Molnár, E., & Vatai, G. (2009). Integrated membrane process for blackcurrant (*Ribes nigrum* L.) juice concentration. *Desalination*, 241(1), 281–287.
- Barros, A. I. R. N. A., Nunes, F. M., Gonçalves, B., Bennett, R. N., & Silva, A. P. (2011). Effect of cooking on total vitamin C contents and antioxidant activity of sweet chestnuts (*Castanea sativa* Mill.). *Food Chemistry*, 128, 165–172.
- Bélafi-Bakó, K., & Koroknai, B. (2006). Enhanced water flux in fruit juice concentration: Coupled operation of osmotic evaporation and membrane distillation. *Journal of Membrane Science*, 269(1), 187–193.
- Ben Amar, R., Gupta, B. B., & Jaffrin, M. Y. (1990). Apple juice clarification using mineral membranes: Fouling control by backwashing and pulsating flow. *Journal of Food Science*, 55(6), 1620–1625.
- Bengtsson, E., Trägårdh, G., & Hallström, B. (1989). Recovery and concentration of apple juice aroma compounds by pervaporation. *Journal of Food Engineering*, 10(1), 65–71.
- Bhattacharjee, C., Saxena, V. K., & Dutta, S. (2017). Watermelon juice concentration using ultrafiltration: Analysis of sugar and ascorbic acid. *Food Science and Technology International* (1082013217714672).
- Börjesson, J., Karlsson, H. O., & Trägårdh, G. (1996). Pervaporation of a model apple juice aroma solution: Comparison of membrane performance. *Journal of Membrane Science*, 119(2), 229–239.
- Boye, J. I., & Arcand, Y. (2012). *Green technologies in food production and processing*. Springer Science & Business Media.
- Brans, G., Schroën, C. G. P. H., van der Sman, R. G. M., & Boom, R. M. (2004). Membrane fractionation of milk: State of the art and challenges. *Journal of Membrane Science*, 243, 263–272.
- Calabro, V., Jiao, B., & Drioli, E. (1994). Theoretical and experimental study on membrane distillation in the concentration of orange juice. *Industrial and Engineering Chemistry Research*, 33(7), 1803–1808.
- Carvalho, L. M. J. D., Castro, I. M., & Silva, C. A. B. D. (2008). A study of retention of sugars in the process of clarification of pineapple juice (*Ananas comosus* L. Merrill) by micro and ultra-filtration. *Journal of Food Engineering*, 87(4), 447–454.
- Carvalho, L. M. J. D., & Silva, C. A. B. D. (2010). Clarification of pineapple juice by microfiltration. *Food Science and Technology*, 30(3), 828–832.
- Cassano, A., Conidi, C., & Drioli, E. (2011). Clarification and concentration of pomegranate juice (*Punica granatum* L.) using membrane processes. *Journal of Food Engineering*, 107(3–4), 366–373.
- Cassano, A., Conidi, C., & Drioli, E. (2013). A membrane-based process for the valorization of the bergamot juice. *Separation Science and Technology*, 48(4), 537–546.
- Cassano, A., Conidi, C., & Tasselli, F. (2015). Clarification of pomegranate juice (*Punica granatum* L.) by hollow fiber membranes: Analyses of membrane fouling and performance. *Journal of Chemical Technology & Biotechnology*, 90(5), 859–866.
- Cassano, A., Conidi, C., Timpone, R., D'avello, M., & Drioli, E. (2007). A membrane-based process for the clarification and the concentration of the cactus pear juice. *Journal of Food Engineering*, 80(3), 914–921.
- Cassano, A., Donato, L., & Drioli, E. (2007). Ultrafiltration of kiwifruit juice: Operating parameters, juice quality and membrane fouling. *Journal of Food Engineering*, 79(2), 613–621.
- Cassano, A., & Drioli, E. (2007). Concentration of clarified kiwifruit juice by osmotic distillation. *Journal of Food Engineering*, 79(4), 1397–1404.
- Cassano, A., & Drioli, E. (2010). Membrane contactors in integrated processes for fruit juice processing. *Membrane Technology: Membranes for Food Applications*, Vol. 3, 167–200.
- Cassano, A., Figoli, A., Tagarelli, A., Sindona, G., & Drioli, E. (2006). Integrated membrane process for the production of highly nutritional kiwifruit juice. *Desalination*, 189, 21–30.
- Cassano, A., Jiao, B., & Drioli, E. (2004). Production of concentrated kiwifruit juice by integrated membrane process. *Food Research International*, 37(2), 139–148.
- Cassano, A., Marchio, M., & Drioli, E. (2007). Clarification of blood orange juice by ultrafiltration: Analyses of operating parameters, membrane fouling and juice quality. *Desalination*, 212(2–3), 15–27.
- Cassano, A., Mecchia, A., & Drioli, E. (2008). Analyses of hydrodynamic resistances and operating parameters in the ultrafiltration of grape must. *Journal of Food Engineering*, 89(2), 171–177.
- Catarino, M., Ferreira, A., & Mendes, A. (2009). Study and optimization of aroma recovery from beer by pervaporation. *Journal of Membrane Science*, 341(1–2), 51–59.
- Chaparro, L., Dhuique-Mayer, C., Castillo, S., Vaillant, F., Servent, A., & Dornier, M. (2016). Concentration and purification of lycopene from watermelon juice by integrated microfiltration-based processes. *Innovative Food Science & Emerging Technologies*, 37, 153–160.
- Chhaya, C., Rai, P., Majumdar, G. C., Dasgupta, S., & De, S. (2008). Clarification of watermelon (*Citrullus lanatus*) juice by microfiltration. *Journal of Food Process Engineering*, 31(6), 768–782.
- Chormomaz, P. M., Pagliero, C., Marchese, J., & Ochoa, N. A. (2013). Impact of structural and textural membrane properties on lemon juice clarification. *Food and Bioprocess Technology*, 91(2), 67–73.
- Cisse, M., Vaillant, F., Perez, A., Dornier, M., & Reynes, M. (2005). The quality of orange juice processed by coupling crossflow microfiltration and osmotic evaporation. *International Journal of Food Science and Technology*, 40(1), 105–116.
- Conidi, C., Cassano, A., Caiazzo, F., & Drioli, E. (2017). Separation and purification of phenolic compounds from pomegranate juice by ultrafiltration and nanofiltration membranes. *Journal of Food Engineering*, 195, 1–13.
- Curcio, E., & Drioli, E. (2005). Membrane distillation and related operations—a review. *Separation and Purification Reviews*, 34(1), 35–86.
- Curcio, S., Calabro, V., Iorio, G., & de Cindio, B. (2001). Fruit juice concentration by membranes: effect of rheological properties on concentration polarization phenomena. *Journal of Food Engineering*, 48(3), 235–241.
- Curcio, E., Barbieri, G., & Drioli, E. (2000). *Direct contact membrane distillation in fruit juice concentration*: Industrie delle Bevande.
- DasGupta, S., & Sarkar, B. (2012). Membrane applications in fruit processing technologies. *Advances in fruit processing technologies* (pp. 87–148). CRC Press.
- De Barros, S. T. D., Andrade, C. M. G., Mendes, E. S., & Peres, L. (2003). Study of fouling mechanism in pineapple juice clarification by ultrafiltration. *Journal of Membrane Science*, 215(1–2), 213–224.
- de Bruijn, J., Venegas, A., & Borquez, R. (2002). Influence of crossflow ultrafiltration on membrane fouling and apple juice quality. *Desalination*, 148(1), 131–136.
- De Bruijn, J. A., Venegas, J. A., Martinez, R., & Borquez, R. (2003). Ultrafiltration performance of Carbosep membranes for the clarification of apple juice. *LWT- Food Science and Technology*, 36(4), 397–406.
- De Oliveira, R. C., Doce, R. C., & de Barros, S. T. D. (2012). Clarification of passion fruit juice by microfiltration: Analyses of operating parameters, study of membrane fouling and juice quality. *Journal of Food Engineering*, 111(2), 432–439.
- Diban, N., Voinea, O. C., Urteaga, A., & Ortiz, I. (2009). Vacuum membrane distillation of the main pear aroma compound: experimental study and mass transfer modeling. *Journal of Membrane Science*, 326(1), 64–75.
- Domingues, R. C. C., Ramos, A. A., Cardoso, V. L., & Reis, M. H. M. (2014). Microfiltration of passion fruit juice using hollow fibre membranes and evaluation of fouling mechanisms. *Journal of Food Engineering*, 121, 73–79.
- Drioli, E., Jiao, B., & Calabrò, V. (1992). The preliminary study on the concentration of orange juice by membrane distillation. *Proceedings of seventh international citrus congress*. Italy: Acreale.
- Espamer, L., Pagliero, C., Ochoa, A., & Marchese, J. (2006). Clarification of lemon juice using membrane process. *Desalination*, 200(1), 565–567.
- Galaverna, G., Di Silvestro, G., Cassano, A., Forza, S., Dossena, A., Drioli, E., & Marchelli, R. (2008). A new integrated membrane process for the production of concentrated blood orange juice. Effect on bioactive compounds and antioxidant activity. *Food Chemistry*, 106(3), 1021–1030.
- García-Castello, E. M., & McCutcheon, J. R. (2011). Dewatering press liquor derived from orange production by forward osmosis. *Journal of Membrane Science*, 372(1), 97–101.
- Ghosh, A. M., Balakrishnan, M., Dua, M., & Bhagat, J. J. (2000). Ultrafiltration of sugarcane juice with spiral wound modules: On-site pilot trials. *Journal of Membrane Science*, 174(2), 205–216.
- Girard, B., & Fukumoto, L. (2000). Membrane processing of fruit juices and beverages: A review. *Critical Reviews in Biotechnology*, 20(2), 109–175.
- Gomes, F. A., Costa, P. A., Campos, M. B. D., Tonon, R. V., Couri, S., & Cabral, L. M. C. (2013). Watermelon juice pretreatment with microfiltration process for obtaining lycopene. *International Journal of Food Science and Technology*, 48(3), 601–608.
- Gulec, H. A., Bagci, P. O., & Bagci, U. (2017). Clarification of apple juice using polymeric ultrafiltration membranes: A comparative evaluation of membrane fouling and juice quality. *Food and Bioprocess Technology*, 10(5), 875–885.
- Gunko, S., Verbych, S., Bryk, M., & Hilal, N. (2006). Concentration of apple juice using direct contact membrane distillation. *Desalination*, 190(1–3), 117–124.
- Gurak, P. D., Cabral, L. M., Rocha-Leao, M. H., Matta, V. M., & Freitas, S. P. (2010). Quality evaluation of grape juice concentrated by reverse osmosis. *Journal of Food Process Engineering*, 96(3), 421–426.
- He, Y., Zhijuan, J., & Shunxin, L. (2007). Effective clarification of apple juice using



- membrane filtration without enzyme and pasteurization pretreatment. *Separation and Purification Technology*, 57(2), 364–371.
- Hedrick, T. I. (1983). Reverse osmosis and ultrafiltration in the food industry: Review. *Drying Technology*, 2(3), 329–352.
- Hermia, J. (1982). Constant pressure blocking filtration law application to powder-law non-Newtonian fluid. *Transactions. Institute of Chemical Engineers*, 60, 183–187.
- Herron, J., Beaudry, E.G., Jochums, C.E., Medina, L.E. (1994). Osmotic Concentration Apparatus for Direct Osmotic Concentration of Fruit Juices. USA patent application 986921. Jan 25, 1994.
- Hogan, P. A., Canning, R. P., Peterson, P., Johnson, R. A., & Michaels, A. S. (1998). A new option: Osmotic distillation. *Chemical Engineering Progress*, 7, 49–61.
- Hojjatpanah, G., Emam-Djomeh, Z., Ashtari, A. K., Mirsaedghazi, H., & Omid, M. (2011). Evaluation of the fouling phenomenon in the membrane clarification of black mulberry juice. *International Journal of Food Science & Technology*, 46(7), 1538–1544.
- Hongvaleerat, C., Cabral, L. M. C., Dornier, M., Reynes, M., & Ningsanond, S. (2008). Concentration of pineapple juice by osmotic evaporation. *Journal of Food Engineering*, 88(4), 548–552.
- Inc, I. (2004). Membrane technology benefits the food processing industry. *Filtration & Separation*, 41(8), 32–33.
- Isci, A., Sahin, S., & Sumnu, G. (2006). Recovery of strawberry aroma compounds by pervaporation. *Journal of Food Engineering*, 75(1), 36–42.
- Jesus, D. F., Leite, M. F., Silva, L. F. M., Matta, V. M., Modesta, R. C. D., & Cabral, L. M. C. (2007). Orange (*Citrus sinensis*) juice concentration by reverse osmosis. *Journal of Food Engineering*, 81(2), 287–291.
- Kang, Y. J., & Rhee, K. C. (2002). Deacidification of mandarin orange juice by electro-dialysis combined with ultrafiltration. *Nutraceuticals and Food*, 7(4), 411–416.
- Karlsson, H. O., & Tragardh, G. (1996). Applications of pervaporation in food processing. *Trends in Food Science & Technology*, 7(3), 78–83.
- Katasonova, O. N., & Fedotov, P. S. (2009). Methods for continuous flow fractionation of microparticles: Outlooks and fields of application. *Journal of Analytical Chemistry*, 64(3), 212–225.
- Kato, T., Shimoda, M., Suzuki, J., Kawaraya, A., Igura, N., & Hayakawa, I. (2003). Changes in the odors of squeezed apple juice during thermal processing. *Food Research International*, 36, 777–785.
- Kechinski, C. P., Guimarães, P. V. R., Noreña, C. P. Z., Tessaro, I. C., & Marczak, L. D. (2010). Degradation kinetics of anthocyanin in blueberry juice during thermal treatment. *Journal of Food Science*, 75, 173–176.
- Klaassen, R., Feron, P. H. M., & Jansen, A. E. (2005). Membrane contactors in industrial applications. *Chemical Engineering Research and Design*, 83(3), 234–246.
- Koroknai, B., Csanádi, Z., Gubicza, L., & Bélafi-Bakó, K. (2008). Preservation of antioxidant capacity and flux enhancement in concentration of red fruit juices by membrane processes. *Desalination*, 228(1–3), 295–301.
- Koseoglu, S. S., Lawhon, J. T., & Lusas, E. W. (1990). Use of membranes in citrus juice processing. *Food Technology*, 44(12), 90–97.
- Kotsanopoulos, K. V., & Arvanitoyannis, I. S. (2015). Membrane processing technology in the food industry: Food processing, wastewater treatment, and effects on physical, microbiological, organoleptic, and nutritional properties of foods. *Critical Reviews in Food Science and Nutrition*, 55, 1147–1175.
- Kozak, A., Bekassy-Molnar, E., & Vatai, G. (2009). Production of blackcurrant juice concentrate by using membrane distillation. *Desalination*, 241(1–3), 309–314.
- Kumar, R., & Ismail, A. F. (2015). Fouling control on microfiltration/ultrafiltration membranes: Effects of morphology, hydrophilicity, and charge. *Journal of Applied Polymer Science*, 132(21).
- Lagana, F., Barbieri, G., & Drioli, E. (2000). Direct contact membrane distillation: Modelling and concentration experiments. *Journal of Membrane Science*, 166(1), 1–11.
- Laorko, A., Li, Z., Tongchitpakdee, S., & Youravong, W. (2010). Effect of membrane property and operating conditions on phytochemical properties and permeate flux during clarification of pineapple juice. *Journal of Food Engineering*, 100(3), 514–521.
- Laorko, A., Li, Z., Tongchitpakdee, S., & Youravong, W. (2011). Effect of gas sparging on flux enhancement and phytochemical properties of clarified pineapple juice by microfiltration. *Separation and Purification Technology*, 80(3), 445–451.
- Lin, J., Rouseff, R. L., Barros, S., & Naim, M. (2002). Aroma composition changes in early season grapefruit produced from thermal concentration. *Journal of Agricultural and Food Chemistry*, 50, 813–839.
- Lipnizki, F. (2010). Cross-flow membrane applications in the food industry. In K. V. Peinemann, S. Pereira, & L. Giorno (Eds.), *Membranes for food applications* (pp. 1–23). Estados Unidos de América: Willey-VCH.
- Lozano, J. E., & Ibarz, A. (1997). Color changes in concentrated fruit pulp during heating at high temperatures. *Journal of Food Engineering*, 63, 303–324.
- Madaeni, S. S., Mohammedi, T., & Moghadam, M. K. (2001). Chemical cleaning of reverse osmosis membranes. *Desalination*, 134, 77–82.
- Maktouf, S., Neifar, M., Drira, S. J., Baklouti, S., Fendri, M., & Chaabouni, S. E. (2014). Lemon juice clarification using fungal pectinolytic enzymes coupled to membrane ultrafiltration. *Food and Bioprocess Processing*, 92(1), 14–19.
- Maskan, M. (2006). Production of pomegranate (*Punica granatum* L.) juice concentrate by various heating methods: Color degradation and kinetics. *Journal of Food Engineering*, 72, 218–224.
- Merin, U. (1986). Bacteriological aspects of microfiltration of cheese whey. *Journal of Dairy Science*, 69(1986), 326–328.
- Merson, R. L., Paredes, G., & Hosaka, D. B. (1980). Concentrating fruit juices by reverse osmosis. *Ultrafiltration membranes and applications* (pp. 405–). New York: Plenum Press.
- Mikkelsen, B. B., & Poll, L. (2002). Decomposition and transformation of aroma compounds and anthocyanins during black currant juice processing. *Journal of Food Science*, 67, 3447–3455.
- Mirsaedghazi, H., & Emam-Djomeh, Z. (2017). Clarification of bitter orange (*Citrus aurantium*) juice using microfiltration with mixed cellulose esters membrane. *Journal of Food Processing and Preservation*, 41(1).
- Mirsaedghazi, H., Mousavi, S. M., Emam-djomeh, Z., Rezaei, K., Aroujalian, A., & Navidbakhsh, M. (2012). Comparison between ultrafiltration and microfiltration in the clarification of pomegranate juice. *Journal of Food Process Engineering*, 35(3), 424–436.
- Mirsaedghazi, H., Emam-Djomeh, Z., Mousavi, S. M., Ahmadvani, R., & Shafiee, A. (2010). Effect of membrane clarification on the physicochemical properties of pomegranate juice. *International Journal of Food Science and Technology*, 45(7), 1457–1463.
- Mirsaedghazi, H., Emam-Djomeh, Z., Mousavi, S. M., Aroujalian, A., & Navidbakhsh, M. (2009). Changes in blocking mechanisms during membrane processing of pomegranate juice. *International Journal of Food Science and Technology*, 44(11), 2135–2141.
- Mirsaedghazi, H., Emam-Djomeh, Z., Mousavi, S. M., Aroujalian, A., & Navidbakhsh, M. (2010). Clarification of pomegranate juice by microfiltration with PVDF membranes. *Desalination*, 264(3), 243–248.
- Mohammad, A., Ng, C., Lim, Y., & Ng, G. (2012). Ultrafiltration in food processing industry: Review on application, membrane fouling, and fouling control. *Food and Bioprocess Technology*, 5(4), 1143–1156.
- Molinari, R., Gagliardi, R., & Drioli, E. (1995). Methodology for estimating saving of primary energy with membrane operations in industrial processes. *Desalination*, 100(1), 125–137.
- Nandi, B. K., Das, B., & Uppaluri, R. (2012). Clarification of orange juice using ceramic membrane and evaluation of fouling mechanism. *Journal of Food Process Engineering*, 35(3), 403–423.
- Nandi, B. K., Uppaluri, R., & Purkait, M. K. (2009). Microfiltration of mosambi juice using low cost ceramic membrane. *Journal of Food Engineering*, 95(4), 597–605.
- Nayak, C. A., Valluri, S. S., & Rastogi, N. K. (2011). Effect of high or low molecular weight of components of feed on transmembrane flux during forward osmosis. *Journal of Food Engineering*, 106(1), 48–52.
- Nene, S., Kaur, S., Sumod, K., Joshi, B., & Raghavarao, K. S. M. S. (2002). Membrane distillation for the concentration of raw cane-sugar syrup and membrane clarified sugarcane juice. *Desalination*, 147(1), 157–160.
- Nisha, P., Singhal, R. S., & Pandit, A. (2009). The degradation kinetics of flavor in black pepper (*Piper nigrum* L.). *Journal of Food Engineering*, 92, 44–49.
- Nisperos-Carriedo, M. O., & Shaw, P. E. (1990). Comparison of volatile flavor components in fresh and processed orange juices. *Journal of Agricultural and Food Chemistry*, 38, 1048–1052.
- Nourbakhsh, H., Alemi, A., Emam-Djomeh, Z., & Mirsaedghazi, H. (2014). Effect of processing parameters on fouling resistances during microfiltration of red plum and watermelon juices: A comparative study. *Journal of Food Science and Technology*, 51(1), 168–172.
- Nunes, S. P., & Peinemann, K.-V. (Eds.), (2001). *Membrane technology in the chemical industry*. Weinheim: Wiley/VCH.
- Oliveira, C. S., Gomes, F. S., Constant, L. S., Silva, L. F., Godoy, R. L., Tonon, R. V., & Cabral, L. M. (2016). Integrated membrane separation processes aiming to concentrate and purify lycopene from watermelon juice. *Innovative Food Science & Emerging Technologies*, 38, 149–154.
- Olsson, J., & Tragardh, G. (1999). Influence of feed velocity on pervaporative aroma recovery from a model solution of apple juice aroma compounds. *Journal of Food Engineering*, 39, 107–115.
- Onsekizoglu Bagci, P. (2015). Potential of membrane distillation for production of high quality fruit juice concentrate. *Critical Reviews in Food Science and Nutrition*, 55(8), 1098–1113.
- Onsekizoglu, P., Bahceci, K. S., & Acar, M. J. (2010). Clarification and the concentration of apple juice using membrane processes: A comparative quality assessment. *Journal of Membrane Science*, 352(1–2), 160–165.
- Pagani, M. M., Rocha-Leão, M. H., Barbosa Couto, A. B., Pinto, J. P., Ribeiro, A. O., dos Santos Gomes, F., & Cabral, L. M. (2011). Concentration of acerola (*Malpighia emarginata* DC.) juice by integrated membrane separation process. *Desalination and Water Treatment*, 27(1–3), 130–134.
- Pagliero, C., Ochoa, N. A., & Marchese, J. (2011). Orange juice clarification by microfiltration: Effect of operational variables on membrane fouling. *Latin American Applied Research*, 41(3), 279–284.
- Pal, S., Bharihoke, R., Chakraborty, S., Ghatak, S. K., De, S., & Das Gupta, S. (2008). An experimental and theoretical analysis of turbulence promoter assisted ultrafiltration of synthetic fruit juice. *Separation and Purification Technology*, 62(3), 659–667.
- Pan, K., Song, Q., Wang, L., & Cao, B. (2011). A study of demineralization of whey by nanofiltration membrane. *Desalination*, 267, 217–221.
- Pereira, C. C., Rufino, J. R. M., Habert, A. C., Nobrega, R., Cabral, L. M. C., & Borges, C. P. J. (2005). Aroma compounds recovery of tropical fruit juice by pervaporation: Membrane material selection and process evaluation. *Journal of Food Engineering*, 66, 77–87.
- Petrots, K. B., & Lazarides, H. N. (2001). Osmotic concentration of liquid foods. *Journal of Food Engineering*, 49(2), 201–206.
- Petrots, K. B., Quantick, P., & Petropakis, H. (1998). A study of the direct osmotic concentration of tomato juice in tubular membrane e module configuration. I. The effect of certain basic process parameters on the process performance. *Journal of Membrane Science*, 150, 99–110.
- Pinelo, M., Zeuner, B., & Meyer, A. S. (2010). Juice clarification by protease and pectinase treatments indicates new roles of pectin and protein in cherry juice turbidity. *Food and Bioprocess Processing*, 88(2), 259–265.
- Provesi, J. G., Dias, C. O., & Amante, E. R. (2011). Changes in carotenoids during processing and storage of pumpkin puree. *Food Chemistry*, 128, 195–202.
- Quist-Jensen, C. A., Macedonio, F., Conidi, C., Cassano, A., Aljil, S., Alharbi, O. A., &

- Drioli, E. (2016). Direct contact membrane distillation for the concentration of clarified orange juice. *Journal of Food Engineering*, 187, 37–43.
- Rai, C., Rai, P., Majumdar, G. C., De, S., & DasGupta, S. (2010). Mechanism of permeate flux decline during microfiltration of watermelon (*Citrullus lanatus*) juice. *Food and Bioprocess Technology*, 3(4), 545–553.
- Rai, P., Majumdar, G. C., Dasgupta, S., & De, S. (2007). Effect of various pretreatment methods on permeate flux and quality during ultrafiltration of mosambi juice. *Journal of Food Engineering*, 78, 561–568.
- Rai, P., Majumdar, G. C., Sharma, S., Das Gupta, S., & De, S. (2006). Effect of various cutoff membrane on permeate flux and quality during filtration of mosambi (*Citrus sinensis* (L.) osbeck) juice. *Food and Bioprocess Technology*, 84(3), 213–219.
- Raisi, A., Aroujalian, A., & Kaghazchi, T. (2008). Multicomponent pervaporation process for volatile aroma compounds recovery from pomegranate juice. *Journal of Membrane Science*, 322(2), 339–348.
- Rajagopalan, N., & Cheryan, M. (1995). Pervaporation of grape juice aroma. *Journal of Membrane Science*, 104, 243–250.
- Ramteke, R. S., Eipeson, W. E., & Patwardhan, M. V. (1990). Behavior of aroma volatiles during the evaporative concentration of some tropical fruit juices and pulps. *Journal of the Science of Food and Agriculture*, 50, 399–405.
- Rana, D., & Matsuura, T. (2010). Surface modifications for antifouling membranes. *Chemical Reviews*, 110(4), 2448–2471.
- Razi, B., Aroujalian, A., Raisi, A., & Fathizadeh, M. (2011). Clarification of tomato juice by cross-flow microfiltration. *International Journal of Food Science & Technology*, 46(1), 138–145.
- Rektor, A., Vatai, G., & Békássy-Molnár, E. (2006). Multi-step membrane processes for the concentration of grape juice. *Desalination*, 191(1–3), 446–453.
- Rezzadori, K., Serpa, L., Penha, F. M., Petrus, R. R., & Petrus, J. C. (2014). Crossflow microfiltration of sugarcane juice: Effects of processing conditions and juice quality. *Food Science and Technology*, 34(1), 210–217.
- Riedel, K., Girard, B., & Lencki, R. W. (1998). Influence of membrane structure on fouling layer morphology during apple juice clarification. *Journal of Membrane Science*, 139(2), 155–166.
- Rodrigues, R. B., Menezes, H. C., Cabral, L. M. C., Dornier, M., Rios, G. M., & Reynes, M. (2004). Evaluation of reverse osmosis and osmotic evaporation to concentrate camu-camu juice. *Journal of Food Engineering*, 63, 97–102.
- Rozoy, E., Boudesocque, L., & Bazinet, L. (2015). Deacidification of cranberry juice by electro dialysis with bipolar membranes. *Journal of Agricultural and Food Chemistry*, 63(2), 642–651.
- Saha, N. K., Balakrishnan, M., & Ulbricht, M. (2007). Sugarcane juice ultrafiltration: FTIR and SEM analysis of polysaccharide fouling. *Journal of Membrane Science*, 306(1), 287–297.
- Sampranpiboon, P., Jiratananon, R., Uttapap, D., Feng, X., & Huang, R. Y. M. (2000). Separation of aroma compounds from aqueous solutions by pervaporation using polyoctylmethyl siloxane (POMS) and polydimethyl siloxane (PDMS) membranes. *Journal of Membrane Science*, 174(1), 55–65.
- Sant'Anna, V., Marczak, L. D. F., & Tessaro, I. C. (2012). Membrane concentration of liquid foods by forward osmosis: Process and quality view. *Journal of Food Engineering*, 111(3), 483–489.
- Sarkar, B., DasGupta, S., & De, S. (2009). Flux decline electric field-assisted cross-flow ultrafiltration of mosambi (*Citrus sinensis* (L.) Osbeck) juice. *Journal of Membrane Science*, 331(1–2), 75–83.
- Saura, D., Marti, N., Valero, M., González, E., Carbonell, A., & Laencina, J. (2012). Separation of aromatics compounds during the clarification of lemon juice by cross-flow filtration. *Industrial Crops and Products*, 36(1), 543–548.
- Schafer, T., Bengtsem, G., Pingel, H., Bödeleker, K. W., & Crespo, J. P. S. G. (1999). Recovery of aroma compounds from a wine-must fermentation by organophilic pervaporation. *Biotechnology and Bioengineering*, 62, 412–421.
- Serre, E., Rozoy, E., Pedneault, K., Lacour, S., & Bazinet, L. (2016). Deacidification of cranberry juice by electro dialysis: Impact of membrane types and configurations on acid migration and juice physicochemical characteristics. *Separation and Purification Technology*, 163, 228–237.
- Shaffer, D. L., Werber, J. R., Jaramillo, H., Lin, S., & Elimelech, M. (2015). Forward osmosis: Where are we now? *Desalination*, 356, 271–284.
- Shalini, H. N., & Nayak, C. A. (2016). Forward osmosis membrane concentration of raw sugarcane juice. *Recent advances in chemical engineering* (pp. 81–88). Singapore: Springer.
- Shaw, P. E., Lebrun, M., Dornier, M., Ducamp, M. N., Courel, M., & Reynes, M. (2001). Evaluation of concentrated orange and passionfruit juices prepared by osmotic evaporation. *LWT- Food Science and Technology*, 34(2), 60–65.
- Shepherd, A., Habert, A. C., & Borges, C. P. (2002). Hollow fibre modules for orange juice aroma recovery using pervaporation. *Desalination*, 148(1), 111–114.
- Sotoft, L. F., Christensen, K. V., Andrésen, R., & Norddahl, B. (2012). Full scale plant with membrane based concentration of blackcurrant juice on the basis of laboratory and pilot scale tests. *Chemical Engineering and Processing: Process Intensification*, 54, 12–21.
- Souhaimi, M. K., & Matsuura, T. (2011). *Membrane distillation: Principles and applications*. Elsevier.
- Souza, A. L., Pagani, M. M., Dornier, M., Gomes, F. S., Tonon, R. V., & Cabral, L. M. (2013). Concentration of camu-camu juice by the coupling of reverse osmosis and osmotic evaporation processes. *Journal of Food Engineering*, 119(1), 7–12.
- Stankiewicz, A. I., & Moulijn, A. J. (2000). Process intensification: Transforming chemical engineering. *Chemical Engineering Progress*, 96, 22–33.
- Su, S. K., Liu, J. C., & Wiley, R. C. (1993). Cross-flow microfiltration with gas backwash of apple juice. *Journal of Food Science*, 58(3), 638–641.
- Takács, L., Vatai, G., & Korány, K. (2007). Production of alcohol free wine by pervaporation. *Journal of Food Engineering*, 78(1), 118–125.
- Tasselli, F., Cassano, A., & Drioli, E. (2007). Ultrafiltration of kiwifruit juice using modified poly (ether ether ketone) hollow fibre membranes. *Separation and Purification Technology*, 57(1), 94–102.
- Timoumi, S., Mihoubi, D., & Zagrouba, F. (2007). Shrinkage, vitamin C degradation and aroma losses during infra-red drying of apple slices. *LWT- Food Science and Technology*, 40, 1648–1654.
- Toker, R., Karhan, M., Tetik, N., Turhan, I., & Oziyci, H. R. (2013). Effect of ultrafiltration and concentration processes on the physical and chemical composition of blood orange juice. *Journal of Food Processing & Preservation*, 38(3), 1321–1329.
- Toribo, J. L., & Lozano, J. E. (1986). Heat induced browning of clarified apple juice at high temperatures. *Journal of Food Science*, 51(172–175), 179.
- Ushikubo, F. Y., Watanabe, A. P., & Viotto, L. A. (2007). Microfiltration of umbu (*Spondias tuberosa* Arr. Cam.) juice. *Journal of Membrane Science*, 288(1–2), 61–66.
- Vaillant, F., Cisse, M., Chaverri, M., Perez, A., Dornier, M., Viquez, F., & Dhuique-Mayer, C. (2005). Clarification and concentration of melon juice using membrane processes. *Innovative Food Science & Emerging Technologies*, 6(2), 213–220.
- Vaillant, F., Jeanton, E., Dornier, M., O'Brien, G. M., Reynes, M., & Decloux, M. (2001). Concentration of passion fruit juice on an industrial pilot scale using osmotic evaporation. *Journal of Food Engineering*, 47(3), 195–202.
- Vaillant, F., Millan, P., Brien, G., & Decloux, M. (1999). Cross-flow microfiltration of passion fruit juice after partial enzymatic liquefaction. *Journal of Food Engineering*, 42(4), 215–225.
- Vaillant, F., Millan, A., Dornier, M., Decloux, M., & Reynes, M. (2001). Strategy for economical optimization of the clarification of pulpy fruit juices using crossflow microfiltration. *Journal of Food Engineering*, 48, 83–90.
- Van den Hout, R., Meerdink, G., & Vant Riet, K. (1999). Modeling of the inactivation kinetics of the trypsin inhibitors in soy flour. *Journal of the Science of Food and Agriculture*, 79, 63–70.
- Varavoh, S., Jiratananon, R., & Atcharyawut, S. (2009). Experimental study on dealcoholization of wine by osmotic distillation process. *Separation and Purification Technology*, 66, 313–321.
- Verá, E., Ruales, J., Dornier, M., Sandeaux, J., Persin, F., Pourcelly, G., ... Reynes, M. (2003a). Comparison of different methods for deacidification of clarified passion fruit juice. *Journal of Food Engineering*, 59, 361–367.
- Verá, E., Ruales, J., Dornier, M., Sandeaux, J., Sandeaux, R., & Pourcelly, G. (2003b). Deacidification of the clarified passion fruit juice using different configurations of electro dialysis. *Journal of Chemical Technology and Biotechnology*, 78, 918–925.
- Verá, E., Sandeaux, J., Persin, F., Pourcelly, G., Dornier, M., Piombo, G., & Ruales, J. (2007a). Deacidification of clarified tropical fruit juices by electro dialysis. Part II. Characteristics of the deacidified juices. *Journal of Food Engineering*, 78, 1439–1445.
- Verá, E., Sandeaux, J., Persin, F., Pourcelly, G., Dornier, M., & Ruales, J. (2007b). Deacidification of clarified tropical fruit juices by electro dialysis. Part I. Influence of operating conditions on the process performances. *Journal of Food Engineering*, 78, 1427–1438.
- Verá, E., Sandeaux, J., Persin, F., Pourcelly, G., Dornier, M., & Ruales, J. (2009). Deacidification of passion fruit juice by electro dialysis with bipolar membrane after different pretreatments. *Journal of Food Engineering*, 90, 67–73.
- Vladislavjevic, G. T., Vukosavljevic, P., & Bukvic, B. (2003). Permeate flux and fouling resistance in ultrafiltration of depectinized apple juice using ceramic membranes. *Journal of Food Engineering*, 60(3), 241–247.
- Vyas, H. K., & Tong, P. S. (2003). Process for calcium retention during skim milk ultrafiltration. *Journal of Dairy Science*, 86, 2761–2766.
- Walton, J., Lu, H., Turner, C., Solis, S., & Hein, H. (2004). Solar and waste heat desalination by membrane distillation. *Desalination and water purification research and development program report. 81. Desalination and water purification research and development program report* (pp. 20–). .
- Warczak, J., Ferrando, M., Lopez, F., & Guell, C. (2004). Concentration of apple and pear juices by nanofiltration at low pressures. *Journal of Food Engineering*, 63(1), 63–70.
- Wrostad, R. E., McDaniel, M. R., Durst, R. W., Micheals, N., Lampi, K. A., & Beaudry, E. G. (1993). Composition and sensory characterisation of red raspberry juice concentrated by direct osmosis or evaporation. *Journal of Food Science*, 58, 633–637.
- Yazdanshenas, M., Tabatabaeezad, S. A. R., Roostaazad, R., & Khoshfetrat, A. B. (2005). Full scale analysis of apple juice ultrafiltration and optimization of diafiltration. *Separation and Purification Technology*, 47(1–2), 52–57.
- Youn, K. S., Hong, J. H., Bae, D. H., Kim, S. J., & Kim, S. D. (2004). Effective clarifying process of reconstituted apple juice using membrane filtration with filter-aid pretreatment. *Journal of Membrane Science*, 228(2), 179–186.
- Yousefmezah, B., Mirsaedghazi, H., & Arabhosseini, A. (2016). Pretreatment of pomegranate and red beet juices by centrifugation before membrane clarification: a comparative study. *Journal of Food Processing and Preservation*.
- Zarate-Rodriguez, E., Ortega-Rivas, E., & Barbosa-Canovas, G. V. (2001). Effect of membrane pore size on quality of ultrafiltered apple juice. *International Journal of Food Science and Technology*, 36(6), 663–667.
- Zhang, Z., Yang, R., Zhang, S., Zhao, H., & Hua, X. (2011). Purification of lactulose syrup by using nanofiltration in a diafiltration mode. *Journal of Food Engineering*, 105, 112–118.
- Zhu, Z., Luo, J., Ding, L., Bals, O., Jaffrin, M. Y., & Vorobiev, E. (2013). Chicory juice clarification by membrane filtration using rotating disk module. *Journal of Food Engineering*, 115(2), 264–271.
- Zhu, Z., Mhemdi, H., Ding, L., et al. (2015). Dead-end dynamic ultrafiltration of juice expressed from electroporated sugar beets. *Food and Bioprocess Technology*, 8(3), 615–622.